


SMPTE STANDARD

for Television Digital Component Recording — 19-mm Type D-1 — Helical Data and Control Records



Page 1 of 37 pages

1 Scope

This standard specifies the content, format, and recording method of the data blocks forming the helical records on the tape containing video, audio, and associated data in 19-mm type D-1 television digital component recording. In addition, clause 6 of this document specifies the content, format, and recording method of the longitudinal record containing tracking information for the scanning head associated with the helical records. Track dimensions and locations are specified in ANSI/SMPTE 224M.

The standard applies to recorders operating in the 525-line television system with a frame frequency of 29.97 Hz nominal and in accord with ITU-R BT.601. One video channel and four independent audio channels are recorded. Audio channels operate in accord with ANSI S4.40 at a 48-kHz sampling frequency.

Figure 1 shows a block diagram of the processes involved in the recorder.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this

standard are encouraged to investigate the possibility of applying the most recent edition of the standards indicated below.

ANSI S4.40-1992, Digital Audio Engineering — Serial Transmission Format for Two-Channel Linearly Represented Digital Audio Data

ANSI/SMPTE 224M-1996, Television Digital Component Recording — 19-mm Type D-1 — Tape Record

ITU-R BT. 601-5, Studio Encoding Parameters of Digital Television for Standard 4:3 and Wide-Screen 16:9 Aspect Ratios

3 Helical record content, format, synchronization, and recording method

3.1 Introduction

The helical track defined mechanically in ANSI/SMPTE 224M is recorded with the digital data from the video channel and the four audio channels. Data is arranged in six sectors per track as shown in figure 2. Two sectors are employed for video data and four sectors each containing data from one of the four audio channels. Details of sector assignment are shown in clauses 4 and 5 of this document. Each sector is divided into the following elements:

The user's attention is called to the possibility that compliance with this standard may require use of an invention covered by patent rights.

By publication of this standard, no position is taken with respect to the validity of this claim or of any patent rights in connection therewith. The patent holder has, however, filed a statement of

willingness to grant a license under these rights on reasonable and nondiscriminatory terms and conditions to applicants desiring to obtain such a license. Details may be obtained from the publisher.

No representation or warranty is made or implied that this is the only license that may be required to avoid infringement in the use of this standard.

CAUTION NOTICE: This Standard may be revised or withdrawn at any time. The procedures of the Standard Developer require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of publication. Purchasers of standards may receive current information on all standards by calling or writing the Standard Developer. Printed in USA.

- Preamble containing a clock run-up sequence, sync pattern, and identification pattern;
- Sync blocks containing sync pattern and an identification pattern followed by a fixed length data block with error control;
- Postamble containing channel sync pattern and an identification pattern.

Details of the elements are shown in figure 3. The space between sectors may be unrecorded or filled with the clock run-up sequence (CC)_H. This space is used to accommodate sector timing errors and to allow editing.

A portion of the guard-space at the beginning of the track may contain run-up sequence data pattern (CC)_H of a length up to 100 bytes.

3.2 Labelling convention for audio and video data

3.2.1 The least significant bit is written on the left and is the first recorded to tape.

3.2.2 The lowest numbered byte is shown at left/top and is the first encountered in the input data stream.

3.2.3 Byte values are expressed in hexadecimal notation unless otherwise noted.


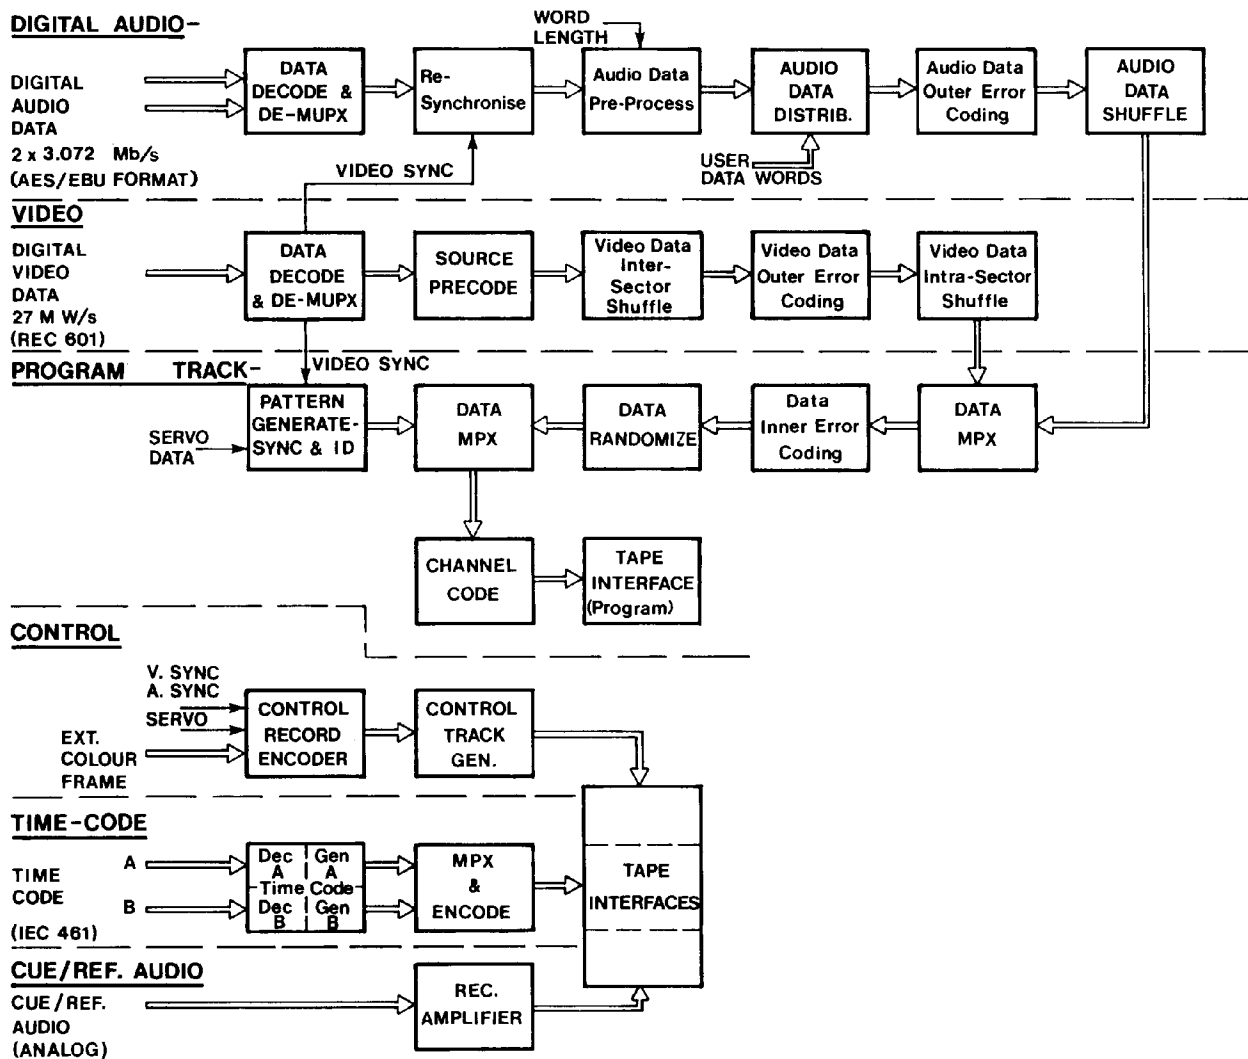


Figure 1 – Digital recorder — Record path processing

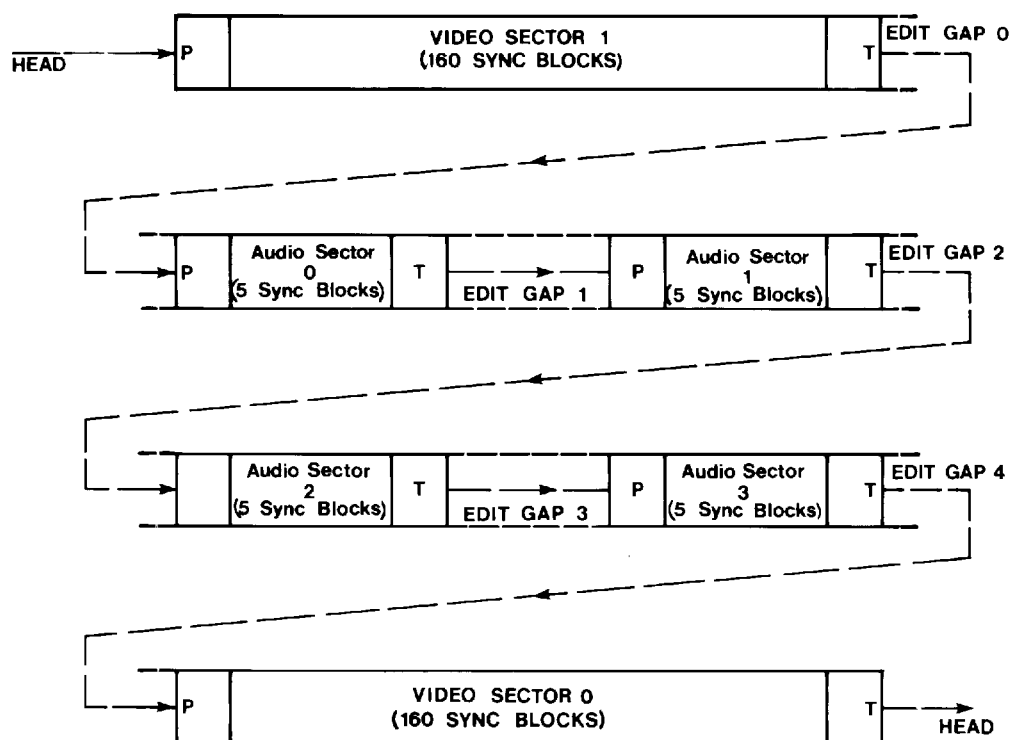

P = PRE-AMBLE (30 BYTES)





T = POST-AMBLE (6 BYTES)

SYNC BLOCK (134 BYTES)

Figure 2 Sector arrangement on helical track

Table 1 – Helical track sector length

Sector name	Length mm	Size	
		S. blocks	Bytes
V1	77.71	160	21476
A0	2.55	5	706
A1	2.55	5	706
A2	2.55	5	706
A3	2.55	5	706
V0	77.71	160	21476
Edit gap 0-4	5×0.84	—	5×232
Total	169.83 ¹⁾	—	46936
¹⁾ 169.83 is derived from specified value $\frac{170.0 \text{ mm}}{1.001}$			

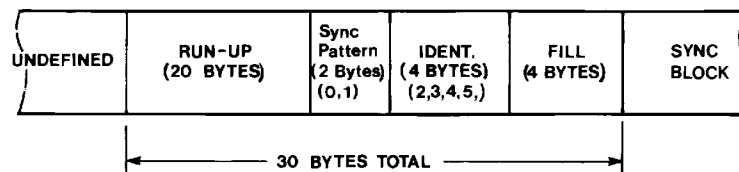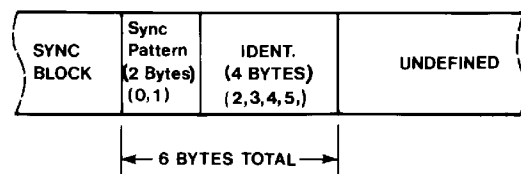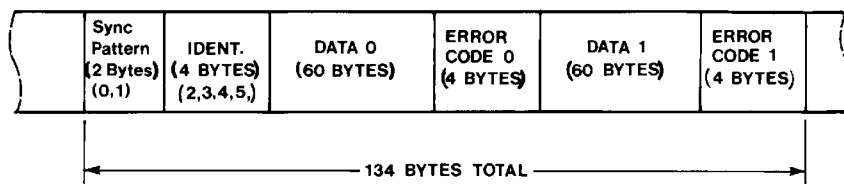(a) PREAMBLE**(b) POSTAMBLE****(c) SYNC BLOCK****(d) SECTOR****Figure 3 – Sector components****3.3 Sector details****3.3.1 Sync block**

Details of the sync block are shown in figure 3(c). All sync blocks consist of 134 bytes consisting of sync pattern (2 bytes) and identification pattern (4 bytes including error coding) followed by 128 data bytes.

3.3.2 Sync pattern

(a) Length: 16 bits (2 bytes)

(b) Pattern: 30 F5 (in hexadecimal notation)

	LSB	MSB
Byte 0	0 0 0 0	1 1 0 0
	LSB	MSB
Byte 1	1 0 1 0	1 1 1 1

(c) Protection: None

(d) Randomization: None

3.3.3 Identification pattern

(a) Length: 32 bits (4 bytes)

(b) Arrangement:

Byte 2 — sync block ID — see figure 4

Byte 3 — sync block ID — see figure 4

Byte 4 — segment ID — see figures 4 and 9

Byte 5 — sector ID — see figures 4 and 9

(c) Protection: 4 to 8 mapping as in table 2

(d) Randomization: None

The values of the sync block ID are shown in figure 4.

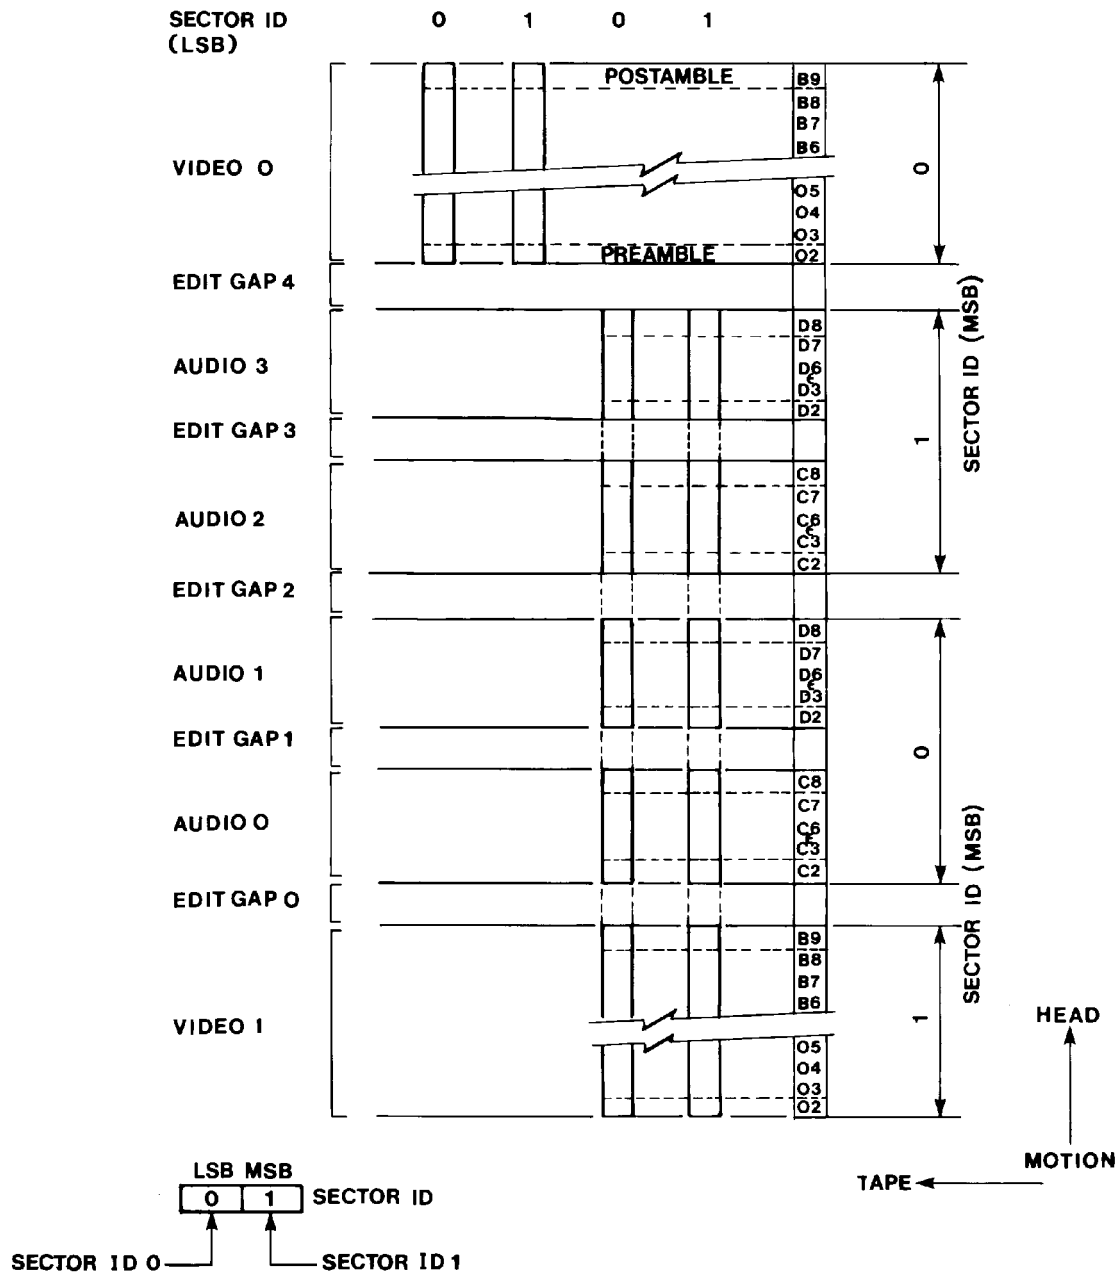


Figure 4 – Values of sync block identification and sector identification codes

Table 2 – 4- to 8-bit mapping

Input	Output	Input	Output
0	1B	8	96
1	2E	9	A3
2	35	A	B8
3	47	B	CA
4	5C	C	D1
5	69	D	E4
6	72	E	Illegal
7	8D	F	
NOTE – Values expressed are hexadecimal.			

3.3.3.1 Identification pattern — Byte 2

Mapped from word 0 (4 bits) where word 0 is the right-hand character identified in figure 4 (see table 2 and figure 5).

3.3.3.2 Identification pattern — Byte 3

Mapped from word 1 (4 bits) where word 1 is the left-hand character identified in figure 4 (see table 2 and figure 6).

3.3.3.3 Identification pattern — Byte 4

Mapped from word 2 (4 bits) by table 2 (see figure 7).


3.3.3.4 Identification pattern — Byte 5

Mapped from word 3 (4 bits) by table 2 (see figure 8).

Figure 5 – Identification pattern — Byte 2**Figure 7 – Identification pattern — Byte 4****Figure 6 – Identification pattern — Byte 3****Figure 8 – Identification pattern — Byte 5**

Notes to figures 5, 6, 7, and 8

- 1 Sync block ID is an 8-bit word formed from two 4-bit words, each lying in the range 0 – D_H, uniquely identifying each sync block within one sector. Figure 4 specifies these values.
- 2 Field ID lies in the range 0 – 3 with the origin aligned with the field sequence identification pulse doublet mark (see clause 6). The values of field ID are shown in figure 9. These values must be continuous, even after editing operations.
- 3 Segment ID lies in the range 0 – 4 as shown in figure 9.

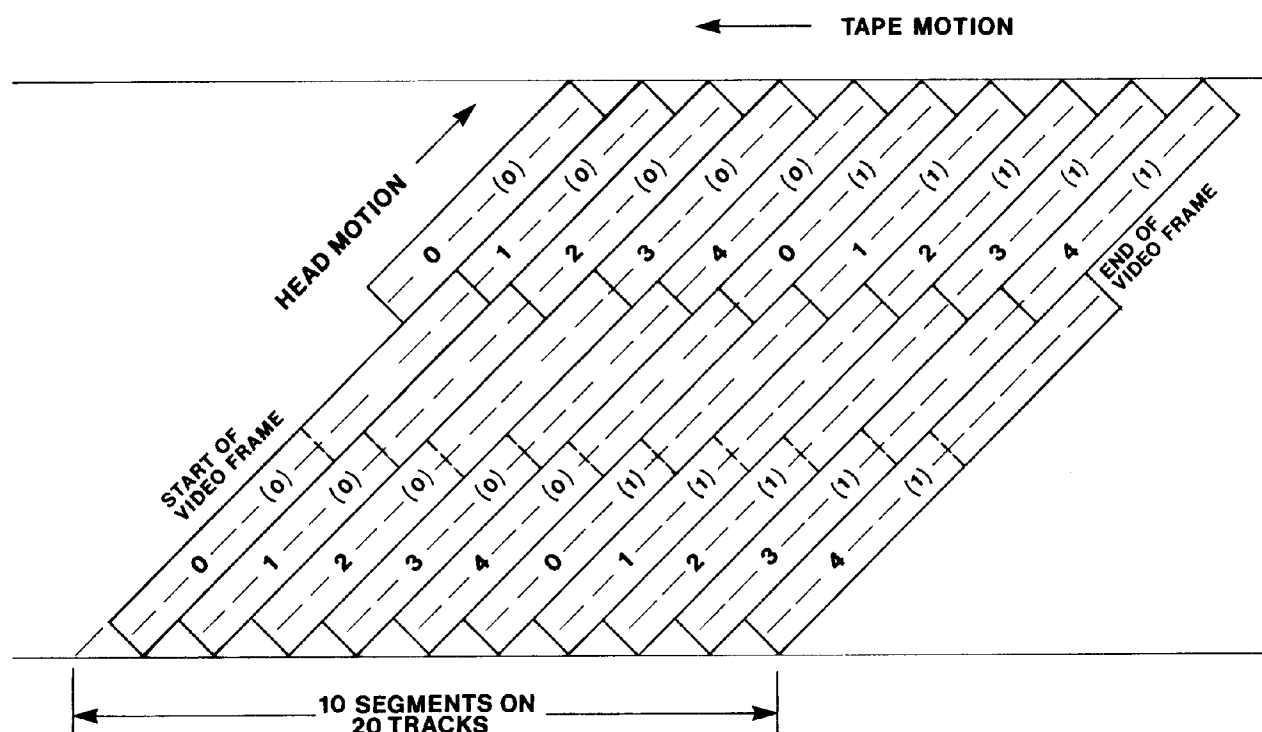

NOTES

- 1 Segment numbers lie in the range 0–4 (unbracketed).
- 2 Field numbers lie in the range 0–3 (bracketed).
- 3 Fields 0–1 shown; Fields 2–3 are similar.

Figure 9 – Segment and field numbers

3.3.4 Data field – Sync block

This block construction is used for all audio and video data and the associated error correction data.

(a) Length: 2 inner code blocks, each of 60 data bytes plus 4 inner error-code check bytes. (Outer error-code check bytes are considered as data.)

(b) Arrangement: See figure 3(c).

(c) Protection (inner code):

Type: Reed-Solomon

Galois field: GF(256)

Field generator polynomial: $x^8 + x^4 + x^3 + x^2 + x^0$ (x^i are place keeping variables in GF(2), the binary field).

Order of use: Left-most term is most significant, "oldest" in time computationally, and first written to tape.

Code generator polynomial (in GF(256)): $G(x) = (x + \alpha^0)(x + \alpha^1)(x + \alpha^2)(x + \alpha^3)$, where α^1 is given by 02H in GF(256).

Check characters: K_3, K_2, K_1, K_0 in $K_3x^3 + K_2x^2 + K_1x^1 + K_0x^0$ obtained as the remainder after dividing $x^4 \times D(x)$ by $G(x)$ where $D(x) = B_{59}x^{59} + B_{58}x^{58} + \dots + B_1x^1 + B_0x^0$.

Equation of full code: $B_{59}x^{63} + B_{58}x^{62} + \dots + B_0x^4 + K_3x^3 + \dots + K_0x^0$.

An example of three possible patterns is shown in table 3, where pattern 1 is the impulse function where the values in the check locations represent the expansion of the code generator polynomial.

Table 3 – Sync block data field patterns

Symbol position	Data symbols D(x)							Check symbols					
	0	1	2	3	4	5	6	58	59	60	61	62	63
Pattern 1	00	00	00	00	00	00	00	00	01	0F	36	78	40
Pattern 2	00	01	02	03	04	05	06	3A	3B	85	24	A9	08
Pattern 3	CC	CC	CC	CC	CC	CC	CC	CC	CC	B6	D4	B6	D4
Symbol identify	B ₅₉	B ₅₈	B ₅₇	B ₅₆	B ₅₅	B ₅₄	B ₅₃	B ₁	B ₀	K ₃	K ₂	K ₁	K ₀

(d) Interleaving: Not used.

(e) Randomization: All data and error correction check characters are randomized before being recorded. (Sync, identification, and fill patterns are not randomized). The randomizing is equivalent to performing the EXOR operation between the serial data stream, and the serial stream generated by the polynomial function $x^8 + x^4 + x^3 + x^2 + x^0$ (in GF(2)). The first term is the most significant and the first to enter the division computation.

In order that successive sync blocks are randomized with different sequences, the polynomial generator noted above is pre-set to 80_H (see note) to read for byte 0 of the sync block locations having ID values as follows:

03, 08, 0D, 14, 19, 20, 25, 2A, 31, 36, 3B, 42, 47, 4C, 53, 58, 5D, 64, 69, 70, 75, 7A, 81, 86, 8B, 92, 97, 9C, A3, A8, AD, B4, C3, D3.

NOTE – This will generate a byte sequence beginning 80, 38, D2, 81, 49, etc. Although the sync and identification patterns are not randomized, the polynomial generator continues to cycle during this period.

3.3.5 Sector preamble

All sectors commence with the preamble sequence.

(a) Length: 30 bytes

(b) Arrangement: See figure 3(a)

Run-up: 20 bytes minimum of CC_H (for clock reference)

Sync pattern: 2 bytes (see 3.3.2)

Identification pattern: 4 bytes (see 3.3.3)

Fill: 4 bytes of CC_H

(c) Protection: None (ID data directly recorded)

(d) Randomization: None

(e) Interleaving: None

3.3.6 Sector postamble

All sectors terminate with the postamble sequence.

(a) Length: 6 bytes

(b) Arrangement: See figure 3(b)

Sync pattern: 2 bytes (see 3.3.2)

Identification pattern: 4 bytes (see 3.3.3)

(c) Protection: None

(d) Randomization: None

(e) Interleaving: None

3.4 Edit gaps

The space, of 232-byte (0.84 mm) nominal length, between sectors may be left unwritten. The area may be unwritten or filled with (CC)_H.

3.5 Channel code

The NRZ data stream shall be recorded directly without further coding.

3.6 Magnetization

During the time interval of a recorded data 1, the polarity of data flux shall be such that the north pole of the magnetic domain shall point in the direction of head motion. Similarly, during the time interval of a recorded data 0, the polarity of data flux shall be such as to cause the south pole of the magnetic domain to point in the direction of head motion. Magnetization shall bring the tape to saturation.

4 Video processing

4.1 Recorded data

Information received during the digital horizontal blanking interval is not recorded on tape. The appropriate blanking data are recreated for output during playback.

4.1.1 Recorded lines

The last 250 lines from each television field are recorded. These comprise lines 14 through 263 inclusive from field 1 and lines 276 through 525 inclusive from field 2. Lines 21 to 263 inclusive and 283 to 525 inclusive contain video data.

4.1.2 Digital active line

A total of 1440 bytes, are recorded: 720 luminance bytes and 360 bytes for each of the two color-difference components. These are taken from bytes 0 through 1439 following the 4-byte start of active video (SAV) timing reference signals.

4.1.3 Source precoding

The input video data stream is precoded by a one-for-one mapping of each source data byte as defined in

table 4. The inverse mapping for the regeneration of the original video source data bytes is defined in table 5. Data in lines 14-20 and 276-282 inclusive are not precoded.

4.2 Pixel labelling

There are 250 recorded lines per field, with 720 pixels per line. They can be considered as an array of 250 rows by 720 columns, in which each pixel is identified by a pair of integers (i, j), where i identifies the row and is numbered 0 to 249 from top to bottom, and j identifies the column and is numbered 0 to 719 from left to right. Columns with even j are associated with a luminance value Y_{ij} and two cosited color-difference values, CB_{ij} and CR_{ij} , where CB and CR designate scaled B-Y and R-Y components, respectively. The 4:2:2 video data sequence for line i is written as follows:

$$\begin{aligned} &CB_{i,0} \ Y_{i,0} \ CR_{i,0} \ Y_{i,1} \ \dots \\ &CB_{i,k} \ Y_{i,k} \ CR_{i,k} \ Y_{i,k+1} \ \dots \\ &CB_{i,718} \ Y_{i,718} \ CR_{i,718} \ Y_{i,719} \\ &0 \leq i \leq 249 \\ &0 \leq j \leq 719 \\ &\text{and } k = 2(\text{int}(j/2)) \end{aligned}$$

Table 4 – Source video mapping

Input		LS word (4 bits)															
		0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
MS word (4 bits)	0	00	80	40	20	10	08	04	02	01	C0	A0	90	88	84	82	81
	1	60	50	48	44	42	41	30	28	24	22	21	18	14	12	11	0C
	2	0A	09	06	05	03	E0	D0	C8	C4	C2	C1	B0	A8	A4	A2	A1
	3	98	94	92	91	8C	8A	89	86	85	83	70	68	64	62	61	58
	4	54	52	51	4C	4A	49	46	45	43	38	34	32	31	2C	2A	29
	5	26	25	23	1C	1A	19	16	15	13	0E	0D	0B	07	F0	E8	E4
	6	E2	E1	D8	D4	D2	D1	CC	CA	C9	C6	C5	C3	B8	B4	B2	B1
	7	AC	AA	A9	A6	A5	A3	9C	9A	99	96	95	93	8E	8D	8B	87
	8	78	74	72	71	6C	6A	69	66	65	63	5C	5A	59	56	55	53
	9	4E	4D	4B	47	3C	3A	39	36	35	33	2E	2D	2B	27	1E	1D
	A	1B	17	0F	F8	F4	F2	F1	EC	EA	E9	E6	E5	E3	DC	DA	D9
	B	D6	D5	D3	CE	CD	CB	C7	BC	BA	B9	B6	B5	B3	AE	AD	AB
	C	A7	9E	9D	9B	97	8F	7C	7A	79	76	75	73	6E	6D	6B	67
	D	5E	5D	5B	57	4F	3E	3D	3B	37	2F	1F	FC	FA	F9	F6	F5
	E	F3	EE	ED	EB	E7	DE	DD	DB	D7	CF	BE	BD	BB	B7	AF	9F
	F	7E	7D	7B	77	6F	5F	3F	FE	FD	FB	F7	EF	DF	BF	7F	FF

Table 5 – Inverse video mapping

Input		LS word (4 bits)															
		0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
MS word (4 bits)	0	00	08	07	24	06	23	22	5C	05	21	20	5B	1F	5A	59	A2
	1	04	1E	1D	58	1C	57	56	A1	1B	55	54	A0	53	9F	9E	DA
	2	03	1A	19	52	18	51	50	9D	17	4F	4E	9C	4D	9B	9A	D9
	3	16	4C	4B	99	4A	98	97	D8	49	96	95	D7	94	D6	D5	F6
	4	02	15	14	48	13	47	46	93	12	45	44	92	43	91	90	D4
	5	11	42	41	8F	40	8E	8D	D3	3F	8C	8B	D2	8A	D1	D0	F5
	6	10	3E	3D	89	3C	88	87	CF	3B	86	85	CE	84	CD	CC	F4
	7	3A	83	82	CB	81	CA	C9	F3	80	C8	C7	F2	C6	F1	F0	FE
	8	01	0F	0E	39	0D	38	37	7F	0C	36	35	7E	34	7D	7C	C5
	9	0B	33	32	7B	31	7A	79	C4	30	78	77	C3	76	C2	C1	EF
	A	0A	2F	2E	75	2D	74	73	C0	2C	72	71	BF	70	BE	BD	EE
	B	2B	6F	6E	BC	6D	BB	BA	ED	6C	B9	B8	EC	B7	EB	EA	FD
	C	09	2A	29	6B	28	6A	69	B6	27	68	67	B5	66	B4	B3	E9
	D	26	65	64	B2	63	B1	B0	EB	62	AF	AE	E7	AD	E6	E5	FC
	E	25	61	60	AC	5F	AB	AA	E4	5E	A9	A8	E3	A7	E2	E1	FB
	F	5D	A6	A5	E0	A4	DF	DE	FA	A3	DD	DC	F9	D8	F8	F7	FF

4.3 Intersector distribution

Consider the pixels in a field to be numbered according to 4.2.

Let m designate the number of a given line within a segment then

$$m = i \bmod 50$$

Let r designate the sector number within a segment, $0 \leq r \leq 3$.

The pixels within each segment are evenly distributed between the four corresponding sectors as shown in figure 9 and by the following equations:

(i) for the luminance (Y) component,

$$r_y = 2((f+g+j) \bmod 2) + \text{int}(((j+2(m \bmod 2)) \bmod 4)/2)$$

(ii) and for the color-difference components (CB and CR), $r_c = 2((f+g+\text{int}(j/2)) \bmod 2) + \text{int}(((\text{int}(j/2)+2(m \bmod 2)) \bmod 4)/2)$

when g designates the segment in which a given line i falls: $g = \text{int}(i/50)$

f = least significant part of the field ID for the 525 system only.

(The function $\text{int}(x)$ yields the integer part of (x) .)

This results in 180 luminance pixels and 90 pairs of color-difference pixels per line in each sector of a segment.

The distribution of pixels in each sector is further described in table 6.

4.4 Intrasector shuffling

The intrasector shuffling sequence during the record process shall be described in terms of two successive shuffling processes:

- An intraline shuffle which shuffles video and ancillary words within a single line prior to outer error coding;
- A sector array shuffle which shuffles data and error correction code words within the sector, prior to being written to tape.

The sector array dimensions are 32 rows by 600 columns. Each column corresponds to one outer code block and contains 30 video data bytes plus two outer correction check bytes. The sector array is further divided into 10 contiguous subarrays, each having dimensions of 32 rows by 60 columns. The 60 data bytes within a single subarray row correspond to one inner code block on tape.

4.4.1 Intraline shuffle

Let the horizontal pixel index, j , be normalized to the range (0 –179) following the intersector distribution described in 4.3.

For luminance component,
 $jy' = \text{int}(jy/4)$

For the color-difference components (CB and CR),
 $jc' = 2 \text{ int}(jc/8)$

where j' indicates a normalized index.

Then the sector data sequence for a given line contains 360 bytes as shown in table 7.

Table 6 – Intersector shuffling for odd and even lines

For $(f + g) \bmod 2 = 0$										
Even line numbers ($m \bmod 2 = 0$)	$j =$	0 1	2 3	4 5	6 7	8 9	10 11	12 13	14 15	16...
	$r_y =$	0 2	1 3	0 2	1 3	0 2	1 3	0 2	1 3	0
	$r_c =$	0	2	1	3	0	2	1	3	0
Odd line numbers ($m \bmod 2 = 1$)	$j =$	0 1	2 3	4 5	6 7	8 9	10 11	12 13	14 15	16...
	$r_y =$	1 3	0 2	1 3	0 2	1 3	0 2	1 3	0 2	1
	$r_c =$	1	3	0	2	1	3	0	2	1
For $(f + g) \bmod 2 = 1$										
Even line numbers ($m \bmod 2 = 0$)	$j =$	0 1	2 3	4 5	6 7	8 9	10 11	12 13	14 15	16...
	$r_y =$	2 0	3 1	2 0	3 1	2 0	3 1	2 0	3 1	2
	$r_c =$	2	0	3	1	2	0	3	1	2
Odd line numbers ($m \bmod 2 = 1$)	$j =$	0 1	2 3	4 5	6 7	8 9	10 11	12 13	14 15	16...
	$r_y =$	3 1	2 0	3 1	2 0	3 1	2 0	3 1	2 0	3
	$r_c =$	3	1	2	0	3	1	2	0	3

Table 7 – Sector data sequence

k:	0	1	2	3	4	5	6	7	356	357	358	359
byte:	CB ₀	Y ₀	CR ₀	Y ₁	CB ₂	Y ₂	CR ₂	Y ₃	CB ₁₇₈	Y ₁₇₈	CR ₁₇₈	Y ₁₇₉

The 360 luminance and chrominance bytes are distributed among 12 outer code blocks as shown in table 8. Each column represents an outer code block. The last two bytes, KV1 and KV0, are outer correction check bytes added by the outer coder. The byte number refers to the byte position within an outer code block.

Let k be the position of a video data byte within a line of the sector data sequence, following the intersector distribution as described above, $0 \leq k \leq 359$. Let $Oblk$ be the outer block column index of table 7, $0 \leq Oblk \leq 11$. Let $Obyt$ be the outer block byte number of table 7, $0 \leq Obyt \leq 31$.

Then the intraline shuffle described by the following formulas is applied:

$$Oblk = 4 \text{int}(k/120) + (k \bmod 4)$$

$$Obyt = \text{int}((k \bmod 120)/4) \text{ (For } 0 \leq Obyt \leq 29)$$

The result is shown in table 8.

The inverse mapping is given by the formula
 $k = 120 \text{int}(Oblk/4) + (Oblk \bmod 4) + (4 \times Obyt)$

4.4.2 Sector array shuffling

The sector array may be divided into 150 4-column groups, ranging from 0 to 149. The 4 columns within a column group contain (CB, Y, CR, Y) pixel data bytes, respectively. Along a given row within a column group, CB and CR are cosited with respect to the source data, and cosited (or nearly so) with the first Y pixel data byte, while the second Y pixel byte is horizontally offset from the first with respect to the source data.

A column map, which is a permutation of the integers 0 to 149, is used to define the sequence in which column groups are stored in the sector array. A row map, which is a permutation of the integers 0 to 31, is used to define the sequence of rows in which data for a given column is stored in the sector array. The starting point of the row map is different for each column group, and, in addition, the starting point of the row map sequence for the fourth column of each column group is further offset by a constant from the starting point of the row map sequence for the first 3 columns of the column group.

The sector array shuffling is defined by algorithm 1. Tables 9 (a-j) show the result of this algorithm and figure 10 shows a conceptual block diagram of the method. The algorithm may be considered to operate as follows:

The column counter is cleared at the beginning of each 50-line segment, and incremented every outer block or 12 times per TV line. The least significant 2 bits of the column counter select a column within a 4-column group. The most significant 8 bits are used to address a PROM containing the column map function. The row start PROM is used to select an initial starting point for the row map sequence for each column group, except for the fourth column of the column group, which has a different initial starting point for the row map sequence. The row counter is loaded with the row start preset data at the beginning of each outer block and increments mod 32 every data byte. The row map PROM is used to select the actual row address where the byte is stored in the sector array.

Tables 9 (a-j) explicitly list the relation between every byte in the sector array and its location in the input data stream. The array values represent normalized pixel indices, j_y' or j_c' , as defined in 4.4.1.

Algorithm 2 shows the de-shuffling scheme.

4.4.2.1 Algorithm 1, intrasector shuffling (reference only)

Let m designate the line number within a segment, $0 \leq m \leq 49$.

Let $Oblk$ designate the outer block number within a line, as defined in 4.4.1, $0 \leq Oblk \leq 11$.

Let $Obyt$ designate the outer block byte index, as defined in 4.4.1, $0 \leq Obyt \leq 31$.

Define the outer block number counting from beginning of the segment, $lcnt$,

$$lcnt = Oblk + 12m, 0 \leq lcnt \leq 599$$

Define the unpermuted 4-column group number, $lgrp$,

$$lgrp = \text{int}(lcnt/4), 0 \leq lgrp \leq 149$$

Define the permuted 4-column group number, $Jgrp$,

$$Jgrp = (41 \times lgrp) \bmod 150$$

Table 8 – Intraline word shuffle

Byte# (Obyt)	Outer block number within line (Oblok)											
	0	1	2	3	4	5	6	7	8	9	10	11
0	CB0	Y0	CR0	Y1	CB60	Y60	CR60	Y61	CB120	Y120	CR120	Y121
1	CB2	Y2	CR2	Y3	CB62	Y62	CR62	Y63	CB122	Y122	CR122	Y123
2	CB4	Y4	CR4	Y5	CB64	Y64	CR64	Y65	CB124	Y124	CR124	Y125
3	CB6	Y6	CR6	Y7	CB66	Y66	CR66	Y67	CB126	Y126	CR126	Y127
4	CB8	Y8	CR8	Y9	CB68	Y68	CR68	Y69	CB128	Y128	CR128	Y129
5	CB10	Y10	CR10	Y11	CB70	Y70	CR70	Y71	CB130	Y130	CR130	Y131
6	CB12	Y12	CR12	Y13	CB72	Y72	CR72	Y73	CB132	Y132	CR132	Y133
7	CB14	Y14	CR14	Y15	CB74	Y74	CR74	Y75	CB134	Y134	CR134	Y135
8	CB16	Y16	CR16	Y17	CB76	Y76	CR76	Y77	CB136	Y136	CR136	Y137
9	CB18	Y18	CR18	Y19	CB78	Y78	CR78	Y79	CB138	Y138	CR138	Y139
10	CB20	Y20	CR20	Y21	CB80	Y80	CR80	Y81	CB140	Y140	CR140	Y141
11	CB22	Y22	CR22	Y23	CB82	Y82	CR82	Y83	CB142	Y142	CR142	Y143
12	CB24	Y24	CR24	Y25	CB84	Y84	CR84	Y85	CB144	Y144	CR144	Y145
13	CB26	Y26	CR26	Y27	CB86	Y86	CR86	Y87	CB146	Y146	CR146	Y147
14	CB28	Y28	CR28	Y29	CB88	Y88	CR88	Y89	CB148	Y148	CR148	Y149
15	CB30	Y30	CR30	Y31	CB90	Y90	CR90	Y91	CB150	Y150	CR150	Y151
16	CB32	Y32	CR32	Y33	CB92	Y92	CR92	Y93	CB152	Y152	CR152	Y153
17	CB34	Y34	CR34	Y35	CB94	Y94	CR94	Y95	CB154	Y154	CR154	Y155
18	CB36	Y36	CR36	Y37	CB96	Y96	CR96	Y97	CB156	Y156	CR156	Y157
19	CB38	Y38	CR38	Y39	CB98	Y98	CR98	Y99	CB158	Y158	CR158	Y159
20	CB40	Y40	CR40	Y41	CB100	Y100	CR100	Y101	CB160	Y160	CR160	Y161
21	CB42	Y42	CR42	Y43	CB102	Y102	CR102	Y103	CB162	Y162	CR162	Y163
22	CB44	Y44	CR44	Y45	CB104	Y104	CR104	Y105	CB164	Y164	CR164	Y165
23	CB46	Y46	CR46	Y47	CB106	Y106	CR106	Y107	CB166	Y166	CR166	Y167
24	CB48	Y48	CR48	Y49	CB108	Y108	CR108	Y109	CB168	Y168	CR168	Y169
25	CB50	Y50	CR50	Y51	CB110	Y110	CR110	Y111	CB170	Y170	CR170	Y171
26	CB52	Y52	CR52	Y53	CB112	Y112	CR112	Y113	CB172	Y172	CR172	Y173
27	CB54	Y54	CR54	Y55	CB114	Y114	CR114	Y115	CB174	Y174	CR174	Y175
28	CB56	Y56	CR56	Y57	CB116	Y116	CR116	Y117	CB176	Y176	CR176	Y177
29	CB58	Y58	CR58	Y59	CB118	Y118	CR118	Y119	CB178	Y178	CR178	Y179
30	KV1	KV1	KV1	KV1	KV1	KV1	KV1	KV1	KV1	KV1	KV1	KV1
31	KV0	KV0	KV0	KV0	KV0	KV0	KV0	KV0	KV0	KV0	KV0	KV0

Define the sector array column index, Col,
 $Col = 4 \times Jgrp + (Icnt \bmod 4)$, $0 \leq Col \leq 599$

Define $u = 0$ for $(Icnt \bmod 4) = 0, 1, 2$; $u = 1$ for $(Icnt \bmod 4) = 3$

Define the row count starting value, Rstart,
 $Rstart = (30 \times Igrp + 5u) \bmod 32$

Define the row count value, Rcnt,
 $Rcnt = (Obyt + Rstart) \bmod 32$

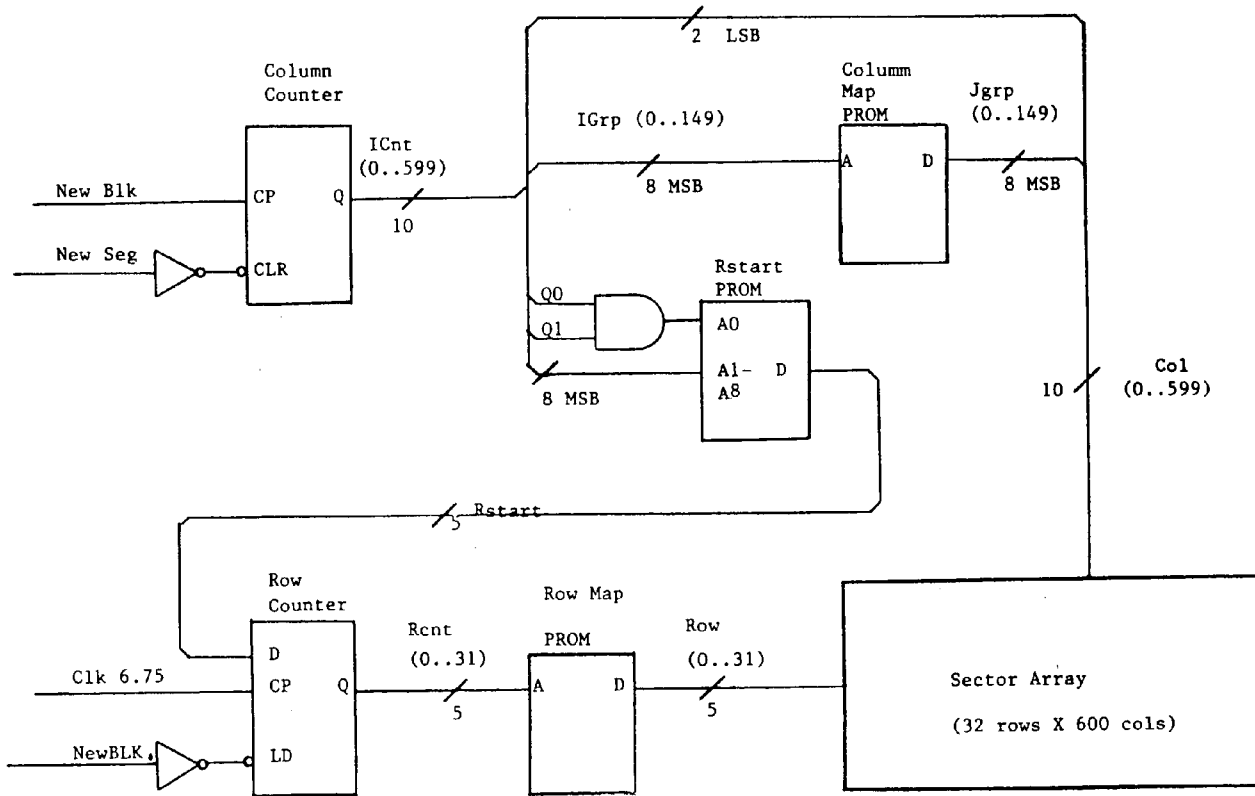


Figure 10 – Intrasector shuffle conceptual implementation
 (Reference only)

Table 9(a) – Intrasector shuffle memory map for subarray 0

Jgrp:	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14																	
Igrp:	0	11	22	33	44	55	66	77	88	99	110	121	132	143	4																	
Line:	0	3	7	11	14	18	22	25	29	33	36	40	44	47	1																	
Col:	0	3	4	7	8	11	12	15	16	19	20	23	24	27	28	31	32	35	36	39	40	43	44	47	48	51	52	55	56	59		
Data:	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y
Rstrt:	0	5	10	15	20	25	30	3	8	13	18	23	28	1	6	11	16	21	26	31	4	9	14	19	24	29	2	7	24	29		
Row	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	171	76	67	
1	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	KV0	113	104	95
2	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	104	95		
3	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	86	77		
4	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	68	KV0		
5	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	114	105		
6	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	96	87		
7	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	78	69		
8	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	60	115		
9	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	106	97		
10	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	88	79		
11	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	70	61		
12	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	116	107		
13	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	98	89		
14	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	80	71		
15	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	62	117		
16	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	108	99		
17	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	90	81		
18	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	72	63		
19	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	118	109		
20	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	100	91		
21	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	82	73		
22	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	64	119		
23	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	110	101		
24	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	92	83		
25	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	74	65		
26	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	KV1	111		
27	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	102	93		
28	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	84	75		
29	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	66	KV1		
30	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	112	103		
31	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	94	85		

NOTES

- Columns 1 and 2 have the same distribution as column 0, columns 5 and 6 the same as 4, etc.
- Numerical table entries represent horizontal position of byte within TV line. KV0 and KV1 are outer ECC check bytes.

Table 9(b) – Intrasector shuffle memory map for subarray 1

Jgrp:	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29
Igrp:	15	26	37	48	59	70	81	92	103	114	125	136	147	8	19
Line:	5	8	12	16	19	23	27	30	34	38	41	45	49	2	6
Col:	60	63	64	67	76	79	80	83	84	87	88	91	92	95	96
Data:	ChYCr	Y	ChYCr	Y	ChYCr	Y	ChYCr	Y	ChYCr	Y	ChYCr	Y	ChYCr	Y	ChYCr
Rstrt:	2	7	12	17	22	27	0	5	10	15	20	25	30	35	40
Row	0	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59
1	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150
2	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132
3	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178
4	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160
5	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142
6	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124
7	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170
8	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152
9	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	174
10	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	156
11	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	138
12	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	120
13	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	166
14	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	148
15	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	130
16	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	176
17	10	1	174	165	94	85	14	5	178	169	98	89	18	9	158
18	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	140
19	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	122
20	20	11	120	175	104	95	24	15	124	179	108	99	28	19	168
21	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	150
22	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	132
23	30	21	130	121	114	105	34	25	174	165	94	85	14	5	178
24	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120
25	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166
26	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148
27	22	13	122	177	106	97	26	17	166	157	86	77	6	KV1	170
28	4	59	168	159	88	79	8	KV0	148	139	68	KV0	54	45	130
29	50	41	150	141	70	61	54	45	130	121	114	105	34	25	174
30	32	23	132	123	116	107	36	27	176	167	96	87	16	7	156
31	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122

NOTES

- Columns 61 and 62 have the same distribution as column 60, columns 65 and 66 the same as 64, etc.
- Numerical table entries represent horizontal position of byte within TV line. KV0 and KV1 are outer ECC check bytes.

Table 9(c) – Intrasector shuffle memory map for subarray 2

Jgrp:	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44															
Igrp:	30	41	52	63	74	85	96	107	118	129	140	1	12	23	34															
Line:	10	13	17	21	24	28	32	35	39	43	46	0	4	7	11															
Col:	120	123	124	127	128	131	132	135	136	139	140	143	144	147	148	151	152	155	156	159	160	163	164	167	168	171	172	175	176	179
Rstrt:	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y
Row	4	9	14	19	24	29	2	7	12	17	22	27	0	5	10	15	20	25	30	3	8	13	30	3	8	13	18	23	28	1
0	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	64	119	48	39	148	139	68	KV0
1	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	110	101	30	21	130	121	114	105
2	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	92	83	12	3	176	167	96	87
3	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	74	65	58	49	158	149	78	69
4	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	KV1	111	40	31	140	131	60	115
5	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	102	93	22	13	122	177	106	97
6	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	84	75	4	59	168	159	88	79
7	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	66	KV1	50	41	150	141	70	61
8	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	112	103	32	23	132	123	116	107
9	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	94	85	14	5	178	169	98	89
10	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	76	67	KV1	51	160	151	80	71
11	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	KV0	113	42	33	142	133	62	117
12	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	104	95	24	15	124	179	108	99
13	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	86	77	6	KV1	170	161	90	81
14	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	68	KV0	52	43	152	143	72	63
15	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	114	105	34	25	134	125	118	109
16	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	96	87	16	7	KV1	171	100	91
17	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	78	69	KV0	53	162	153	82	73
18	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	60	115	44	35	144	135	64	119
19	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	106	97	26	17	126	KV1	110	101
20	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	88	79	8	KV0	172	163	92	83
21	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	70	61	54	45	154	145	74	65
22	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	116	107	36	27	136	127	KV1	111
23	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	98	89	18	9	KV0	173	102	93
24	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	80	71	0	55	164	155	84	75
25	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	62	117	46	37	146	137	66	KV1
26	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	108	99	28	19	128	KV0	112	103
27	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	90	81	10	1	174	165	94	85
28	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	72	63	56	47	156	147	76	67
29	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	118	109	38	29	138	129	KV0	113
30	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	100	91	20	11	120	175	104	95
31	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	82	73	2	57	166	157	86	77

NOTES

- Columns 121 and 122 have the same distribution as column 120, columns 125 and 126 the same as 124, etc.
- Numerical table entries represent horizontal position of byte within TV line. KV0 and KV1 are outer ECC check bytes.

Table 9(d) – Intrasector shuffle memory map for subarray 3

Jgrp:	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59																	
Igrp:	45	56	67	78	89	100	111	122	133	144	5	16	27	38	49																	
Line:	15	18	22	26	29	33	37	40	44	48	1	5	9	12	16																	
Col:	180	183	184	187	188	191	192	195	196	199	200	203	204	207	208	211	212	215	216	219	220	223	224	227	228	231	232	235	236	239		
Data:	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y
Rstrt:	6	11	16	21	26	31	4	9	14	19	24	29	2	7	12	17	22	27	0	5	22	27	0	5	10	15	20	25	30	3		
Row	0	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	140	131	60	115	44	35	144	135	64	119	
1	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	122	177	106	97	26	17	126	KV1	110	101		
2	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	28	19	168	159	88	79	8	KV0	172	163	92	83		
3	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	150	141	70	61	54	45	154	145	74	65		
4	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	132	123	116	107	36	27	136	127	KV1	111		
5	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109	38	29	178	169	98	89	18	9	KV0	173	102	93		
6	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	160	151	80	71	0	55	164	155	84	75		
7	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	142	133	62	117	46	37	146	137	66	KV1		
8	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	48	39	124	179	108	99	28	19	128	KV0	112	103		
9	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	170	161	90	81	10	1	174	165	147	76	67	
10	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	152	143	72	63	56	47	156	147	76	67		
11	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	58	49	134	125	118	109	38	29	138	129	KV0	113		
12	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	KV1	171	100	91	20	11	120	175	104	95		
13	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	162	153	82	73	2	57	166	157	86	77		
14	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	144	135	64	119	48	39	148	139	68	KV0		
15	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	126	KV1	110	101	30	21	130	121	114	105		
16	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	172	163	92	83	12	3	176	167	96	87		
17	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	154	145	74	65	58	49	158	149	78	69		
18	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	136	127	KV1	111	40	31	140	131	60	115		
19	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	KV0	173	102	93	22	13	122	177	106	97		
20	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	164	155	84	75	4	59	168	159	88	79		
21	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	146	137	66	KV1	50	41	150	141	70	61		
22	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	128	KV0	112	103	32	23	132	123	116	107		
23	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	174	165	94	85	14	5	178	169	98	89		
24	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	156	147	76	67	KV1	51	160	151	80	71		
25	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	138	129	KV0	113	42	33	142	133	62	117		
26	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	120	175	104	95	24	15	124	179	108	99		
27	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	166	157	86	77	6	KV1	170	161	90	81		
28	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	148	139	68	KV0	52	43	152	143	72	63		
29	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	130	121	114	105	34	25	134	125	118	109		
30	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	176	167	96	87	16	7	KV1	171	100	91		
31	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	18	9	158	149	78	69	KV0	53	162	153	82	73		

NOTES

- 1 Columns 181 and 182 have the same distribution as column 180, columns 185 and 186 the same as 184, etc.
- 2 Numerical table entries represent horizontal position of byte within TV line. KV0 and KV1 are outer ECC check bytes.

Table 9(e) – Intrasector shuffle memory map for subarray 4

Jgrp:	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74																
Igrp:	60	71	82	93	104	115	126	137	148	9	20	31	42	53	64																
Line:	20	23	27	31	34	38	42	45	49	3	6	10	14	17	21																
Col:	240	243	244	247	248	251	252	255	256	259	260	263	264	267	268	271	272	275	276	279	280	283	284	287	288	291	292	295	296	299	
Data:	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	
Rstrt:	8	13	18	23	28	1	6	11	16	21	26	31	4	9	14	19	24	29	2	7	12	17	22	27	0	5					
Row	0	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	36	27	136	127	KV1	111	40	31	140	131	60	115
1	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	18	9	KV0	173	102	93	22	13	122	177	106	97	
2	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	0	55	164	155	84	75	4	59	168	159	88	79	
3	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	46	37	146	137	66	KV1	50	41	150	141	70	61	
4	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0	28	19	128	KV0	112	103	32	23	132	123	116	107	
5	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	10	1	174	165	94	85	14	5	178	169	98	89	
6	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	56	47	156	147	76	67	KV1	51	160	151	80	71	
7	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69	38	29	138	129	KV0	113	42	33	142	133	62	117	
8	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115	20	11	120	175	104	95	24	15	124	179	108	99	
9	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	2	57	166	157	86	77	6	KV1	170	161	90	81	
10	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79	48	39	148	139	68	KV0	52	43	152	143	72	63	
11	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	70	61	30	21	130	121	114	105	34	25	134	125	118	109	
12	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	12	3	176	167	96	87	16	7	KV1	171	100	91	
13	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	58	49	158	149	78	69	KV0	53	162	153	82	73	
14	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	40	31	140	131	60	115	44	35	144	135	64	119	
15	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	22	13	122	177	106	97	26	17	126	KV1	110	101	
16	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	4	59	168	159	88	79	8	KV0	172	163	92	83	
17	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	50	41	150	141	70	61	54	45	154	145	74	65	
18	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	32	23	132	123	116	107	36	27	136	127	KV1	111	
19	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109	14	5	178	169	98	89	18	9	KV0	173	102	93	
20	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	KV1	51	160	151	80	71	0	55	164	155	84	75	
21	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	42	33	142	133	62	117	46	37	146	137	66	KV1	
22	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	24	15	124	179	108	99	28	19	128	KV0	112	103	
23	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	6	KV1	170	161	90	81	10	1	174	165	94	85	
24	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	52	43	152	143	72	63	56	47	156	147	76	67	
25	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	34	25	134	125	118	109	38	29	138	129	KV0	113	
26	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	16	7	KV1	171	100	91	20	11	120	175	104	95	
27	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	KV0	53	162	153	82	73	2	57	166	157	86	77	
28	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	44	35	144	135	64	119	48	39	148	139	68	KV0	
29	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	26	17	126	KV1	110	101	30	21	130	121	114	105	
30	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103	8	KV0	172	163	92	83	12	3	176	167	96	87	
31	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	54	45	154	145	74	65	58	49	158	149	78	69	

NOTES

- Columns 241 and 242 have the same distribution as column 240, columns 245 and 246 the same as 244, etc.
- Numerical table entries represent horizontal position of byte within TV line. KV0 and KV1 are outer ECC check bytes.

Table 9(f) – Intrasector shuffle memory map for subarray 5

Jgrp:	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89																
Igrp:	75	86	97	108	119	130	141	2	13	24	35	46	57	68	79																
Line:	25	28	32	36	39	43	47	0	4	8	11	15	19	22	26																
Col:	300	303	304	307	308	311	312	315	316	319	320	323	324	327	328	331	332	335	336	339	340	343	344	347	348	351	352	355	356	359	
Data:	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	
Rstrt:	10	15	20	25	30	3	8	13	18	23	28	1	6	11	28	1	6	11	16	21	26	31	4	9	14	19	24	29	2	7	
Row	0	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111
1	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	
2	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	
3	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	
4	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103	
5	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	
6	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	
7	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	
8	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	
9	10	1	174	165	94	85	14	5	178	169	98	89	18	9	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	
10	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0	
11	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	
12	20	11	120	175	104	95	24	15	124	179	108	99	28	19	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	
13	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69	
14	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115	
15	30	21	130	121	114	105	34	25	134	125	118	109	38	29	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	
16	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79	
17	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	70	61	
18	40	31	140	131	60	115	44	35	144	135	64	119	48	39	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	
19	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	
20	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	
21	50	41	150	141	70	61	54	45	154	145	74	65	58	49	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	
22	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	
23	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	
24	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	
25	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109	
26	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	
27	6	KV1	170	161	90	81	*10	1	174	165	94	85	14	5	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	
28	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	
29	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	
30	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	
31	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	

NOTES

- 1 Columns 301 and 302 have the same distribution as column 300, columns 305 and 306 the same as 304, etc.
- 2 Numerical table entries represent horizontal position of byte within TV line. KV0 and KV1 are outer ECC check bytes.

Table 9(g) – Intrasector shuffle memory map for subarray 6

Jgrp:	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104																
Igrp:	90	101	112	123	134	145	6	17	28	39	50	61	72	83	94																
Line:	30	33	37	41	44	48	2	5	9	13	16	20	24	27	31																
Col:	360	363	364	367	368	371	372	375	376	379	380	383	384	387	388	391	392	395	396	399	400	403	404	407	408	411	412	415	416	419	
Data:	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	
Rstrt:	12	17	22	27	0	5	10	15	20	25	30	3	20	25	30	3	8	13	18	23	28	1	6	11	16	21	26	31	4	9	
Row	0	40	31	140	131	60	115	44	35	144	135	64	119	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107
1	22	13	122	177	106	97	26	17	126	KV1	110	101	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	
2	4	59	168	159	88	79	8	KV0	172	163	92	83	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	
3	50	41	150	141	70	61	54	45	154	145	74	65	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	
4	32	23	132	123	116	107	36	27	136	127	KV1	111	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	
5	14	5	178	169	98	89	18	9	KV0	173	102	93	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	
6	KV1	51	160	151	80	71	0	55	164	155	84	75	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	
7	42	33	142	133	62	117	46	37	146	137	66	KV1	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109	
8	24	15	124	179	108	99	28	19	128	KV0	112	103	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	
9	6	KV1	170	161	90	81	10	1	174	165	94	85	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	
10	52	43	152	143	72	63	56	47	156	147	76	67	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	
11	34	25	134	125	118	109	38	29	138	129	KV0	113	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	
12	16	7	KV1	171	100	91	20	11	120	175	104	95	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	
13	KV0	53	162	153	82	73	2	57	166	157	86	77	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	
14	44	35	144	135	64	119	48	39	148	139	68	KV0	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	
15	26	17	126	KV1	110	101	30	21	130	121	114	105	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	
16	8	KV0	172	163	92	83	12	3	176	167	96	87	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	
17	54	45	154	145	74	65	58	49	158	149	78	69	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	
18	36	27	136	127	KV1	111	40	31	140	131	60	115	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103	
19	18	9	KV0	173	102	93	22	13	122	177	106	97	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	
20	0	55	164	155	84	75	4	59	168	159	88	79	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	
21	46	37	146	137	66	KV1	50	41	150	141	70	61	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	
22	28	19	128	KV0	112	103	32	23	132	123	116	107	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	
23	10	1	174	165	94	85	14	5	178	169	98	89	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	
24	56	47	156	147	76	67	KV1	51	160	151	80	71	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0	
25	38	29	138	129	KV0	113	42	33	142	133	62	117	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	
26	20	11	120	175	104	95	24	15	124	179	108	99	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	
27	2	57	166	157	86	77	6	KV1	170	161	90	81	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69	
28	48	39	148	139	68	KV0	52	43	152	143	72	63	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115	
29	30	21	130	121	114	105	34	25	134	125	118	109	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	
30	12	3	176	167	96	87	16	7	KV1	171	100	91	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79	
31	58	49	158	149	78	69	KV0	53	162	153	82	73	42	33	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	

NOTES

- Columns 3611 and 3622 have the same distribution as column 360, columns 365 and 366 the same as 364, etc.
- Numerical table entries represent horizontal position of byte within TV line. KV0 and KV1 are outer ECC check bytes.

Table 9(h) – Intrasector shuffle memory map for subarray 7

Jgrp:	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119																
Igrp:	105	116	127	138	149	10	21	32	43	54	65	76	87	98	109																
Line:	35	38	42	46	49	3	7	10	14	18	21	25	29	32	36																
Col:	420	423	424	427	428	431	432	435	436	439	440	443	444	447	448	451	452	455	456	459	460	463	464	467	468	471	472	475	476	479	
Data:	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	
Rstrt:	14	19	24	29	2	7	12	17	22	27	12	17	22	27	0	5	10	15	20	25	30	3	8	13	18	23	28	1	6	11	
Row	0	36	27	136	127	KV1	111	40	31	140	131	100	91	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103
1	18	9	KV0	173	102	93	22	13	122	177	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	
2	0	55	164	155	84	75	4	59	168	159	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	
3	46	37	146	137	66	KV1	50	41	150	141	110	101	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	
4	28	19	128	KV0	112	103	32	23	132	123	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	
5	10	1	174	165	94	85	14	5	178	169	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	
6	56	47	156	147	76	67	KV1	51	160	151	KV1	111	40	31	140	131	100	91	20	11	120	175	104	95	24	15	124	179	108	99	
7	38	29	138	129	KV0	113	42	33	142	133	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	
8	20	11	120	175	104	95	24	15	124	179	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	
9	2	57	166	157	86	77	6	KV1	170	161	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69	
10	48	39	148	139	68	KV0	52	43	152	143	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115	
11	30	21	130	121	114	105	34	25	134	125	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	
12	12	3	176	167	96	87	16	7	KV1	171	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79	
13	58	49	158	149	78	69	KV0	53	162	153	KV0	113	42	33	142	133	102	93	22	13	122	177	106	97	28	19	128	KV0	112	103	
14	40	31	140	131	60	115	44	35	144	135	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	
15	22	13	122	177	106	97	26	17	126	KV1	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	
16	4	59	168	159	88	79	8	KV0	172	163	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	
17	50	41	150	141	70	61	54	45	154	145	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	
18	32	23	132	123	116	107	36	27	136	127	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	
19	14	5	178	169	98	89	18	9	KV0	173	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	
20	KV1	51	160	151	80	71	0	55	164	155	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	
21	42	33	142	133	62	117	46	37	146	137	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109	
22	24	15	124	179	108	99	28	19	128	KV0	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	
23	6	KV1	170	161	90	81	10	1	174	165	70	61	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	
24	52	43	152	143	72	63	56	47	156	147	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	
25	34	25	134	125	118	109	38	29	138	129	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	
26	16	7	KV1	171	100	91	20	11	120	175	80	71	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	
27	KV0	53	162	153	82	73	2	57	166	157	62	117	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	
28	44	35	144	135	64	119	48	39	148	139	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	
29	26	17	126	KV1	110	101	30	21	130	121	90	81	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	
30	8	KV0	172	163	92	83	12	3	176	167	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	
31	54	45	154	145	74	65	58	49	158	149	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	

NOTES

- Columns 421 and 422 have the same distribution as column 420, columns 425 and 426 the same as 424, etc.
- Numerical table entries represent horizontal position of byte within TV line. KV0 and KV1 are outer ECC check bytes.

Table 9(j) – Intrasector shuffle memory map for subarray 8

JGRP:	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134
IGRP:	120	131	142	3	14	25	36	47	58	69	80	91	102	113	124
Line:	40	43	47	1	4	8	12	15	19	23	26	30	34	37	41
Col:	480	483	484	487	488	491	492	495	496	499	500	503	504	507	508
Data:	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y	CBYCr Y
Rstrt:	16	21	26	31	4	9	26	31	4	9	14	19	24	29	2
Row	0	32	23	132	123	116	107	12	3	176	167	96	87	16	7
1	14	5	178	169	98	89	58	12	49	158	149	78	69	KV0	53
2	2	KV1	51	160	151	80	71	40	31	140	131	60	115	44	35
3	3	42	33	142	133	62	117	22	13	122	177	106	97	26	17
4	4	24	15	124	179	108	99	4	59	168	159	88	79	8	KV0
5	5	6	KV1	170	161	90	81	50	41	150	141	70	61	54	45
6	6	52	43	152	143	72	63	32	23	132	123	116	107	36	27
7	7	34	25	134	125	118	109	14	5	178	169	98	89	18	9
8	8	16	7	KV1	171	100	91	KV1	51	160	151	80	71	0	55
9	9	KV0	53	162	153	82	73	42	33	142	133	62	117	46	37
10	10	44	35	144	135	64	119	24	15	124	179	108	99	28	19
11	11	26	17	126	KV1	110	101	6	KV1	170	161	90	81	10	1
12	12	4	45	154	145	74	65	34	25	134	125	118	109	38	29
13	13	54	27	136	127	KV1	111	16	7	KV1	171	100	91	20	11
14	14	36	27	136	127	KV1	111	16	7	KV1	171	100	91	20	11
15	15	18	9	KV0	173	102	93	KV0	53	162	153	82	73	2	57
16	16	0	55	164	155	84	75	44	35	144	135	64	119	48	39
17	17	46	37	146	137	66	KV1	26	17	126	KV1	110	101	30	21
18	18	28	19	128	KV0	112	103	8	KV0	172	163	92	83	12	3
19	19	10	1	174	165	94	85	54	45	154	145	74	65	58	49
20	20	56	47	156	147	76	67	36	27	136	127	KV1	111	40	31
21	21	38	29	138	129	KV0	113	18	9	KV0	173	102	93	22	13
22	22	20	11	120	175	104	95	0	55	164	155	84	75	4	59
23	23	2	57	166	157	86	77	46	37	146	137	66	KV1	50	41
24	24	48	39	148	139	68	KV0	28	19	128	KV0	112	103	32	23
25	25	30	21	130	121	114	105	10	1	174	165	94	85	14	5
26	26	12	3	176	167	96	87	56	47	156	147	76	67	KV1	51
27	27	58	49	158	149	78	69	38	29	138	129	KV0	113	42	33
28	28	40	31	140	131	60	115	20	11	120	175	104	95	0	55
29	29	22	13	122	177	106	97	2	57	166	157	86	77	4	59
30	30	4	59	168	159	88	79	48	39	148	139	68	KV0	52	43
31	31	50	41	150	141	70	61	30	21	130	121	114	105	34	25

NOTES

- Columns 481 and 482 have the same distribution as column 480, columns 485 and 486 the same as 484, etc.
- Numerical table entries represent horizontal position of byte within TV line. KV0 and KV1 are outer ECC check bytes.

Table 9(j) – Intrasector shuffle memory map for subarray 9

Jgrp:	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149																	
Igrp:	135	146	7	18	29	40	51	62	73	84	95	106	117	128	139																	
Line:	45	48	2	6	9	13	17	20	24	28	31	35	39	42	46																	
Col:	540	543	544	547	548	551	552	555	556	559	560	563	564	567	568	571	572	575	576	579	580	583	584	587	588	591	592	595	596	599		
Data:	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y
Rsrst:	18	23	28	1	18	23	28	1	6	11	16	21	26	31	4	9	14	19	24	29	2	7	12	17	22	27	0	5	10	15		
Row	0	28	19	128	KV0	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	
1	10	1	174	165	70	61	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77		
2	56	47	156	147	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0		
3	38	29	138	129	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105		
4	20	11	120	175	80	71	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87		
5	2	57	166	157	62	117	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69		
6	48	39	148	139	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115		
7	30	21	130	121	90	81	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97		
8	12	3	176	167	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79		
9	58	49	158	149	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	70	61		
10	40	31	140	131	100	91	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107		
11	22	13	122	177	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89		
12	4	59	168	159	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71		
13	50	41	150	141	110	101	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117		
14	32	23	132	123	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99		
15	14	5	178	169	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81		
16	KV1	51	160	151	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63		
17	42	33	142	133	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109		
18	24	15	124	179	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91		
19	6	KV1	170	161	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73		
20	52	43	152	143	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119		
21	34	25	134	125	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101		
22	16	7	KV1	171	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83		
23	KV0	53	162	153	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65		
24	44	35	144	135	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111		
25	26	17	126	KV1	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93		
26	8	KV0	172	163	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75		
27	54	45	154	145	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1		
28	36	27	136	127	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103		
29	18	9	KV0	173	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85		
30	0	55	164	155	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67		
31	46	37	146	137	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113		

NOTES

- Columns 541 and 542 have the same distribution as column 540, columns 545 and 546 the same as 544, etc.
- Numerical table entries represent horizontal position of byte within TV line. KV0 and KV1 are outer ECC check bytes.

Define the sector array row address, Row,

$$\text{Row} = (7 \times \text{Rcnt}) \bmod 32$$

Col and Row define the sector array location where a data byte (either video data or outer correction check) is located.

For field 0, sectors 0 and 2, data are read from the sector array in a “raster scan” sequence and written to tape. (That is, the data in row 0, columns 0 through 599 are read, then row 1, columns 0 through 599, and so forth, through row 31).

For sectors 1 and 3, which are adjacent to sectors 0 and 2, respectively, on tape, the data are read out with a 16-row offset relative to sectors 0 and 2. In addition, there is a further variation of the row address over a 4-field sequence. Table 10 summarizes the row address modification necessary, depending on field and sector number.

Let p designate the inner block number on tape, $0 \leq p \leq 319$.

Let q designate the byte number within an inner block on tape, $0 \leq q \leq 59$.

Then $p = 10R + \text{int}(\text{Col}/60)$.
 $q = \text{Col} \bmod 60$.

The byte at location (Row, Col) in the sector array thus appears at location $60p + q$ on the tape. The sync

block ID number written on tape for even p is $(\text{int}(p/2)+3)$ base 14.

4.4.2.2 Algorithm 2, intrasector deshuffling (reference only)

Given the inner block number, p , and position within the block, q , on tape, calculate R ,

$$R = \text{int}(p/10), 0 \leq R \leq 31.$$

Calculate Row according to table 11.

Calculate Col,

$$\text{Col} = 60(p \bmod 10) + q.$$

Thus, the byte at location $60p + q$ on the tape appears at (Row, Col) in the sector array.

Calculate the 4-column group number, J_{grp} ,

$$J_{\text{grp}} = \text{int}(\text{Col}/4), 0 \leq J_{\text{grp}} \leq 149.$$

Calculate the inverse permuted 4-column group number, I_{grp} ,

$$I_{\text{grp}} = (11 \times J_{\text{grp}}) \bmod 150.$$

Calculate I_{cnt} ,

$$I_{\text{cnt}} = (I_{\text{grp}} \times 4) + (\text{Col} \bmod 4), 0 \leq I_{\text{cnt}} \leq 599.$$

Define $u = 0$ for $(I_{\text{cnt}} \bmod 4) = 0, 1, 2$,
 $u = 1$ for $(I_{\text{cnt}} \bmod 4) = 3$

Table 10 – Four-field sequence intrasector shuffling

	Sectors 0, 2	Sectors 1, 3
Field 0:	$R = \text{Row}$	$R = (16 + \text{Row}) \bmod 32$
Field 1:	$R = (31 - \text{Row}) \bmod 32$	$R = (15 - \text{Row}) \bmod 32$
Field 2:	$R = (8 + \text{Row}) \bmod 32$	$R = (24 + \text{Row}) \bmod 32$
Field 3:	$R = (7 - \text{Row}) \bmod 32$	$R = (23 - \text{Row}) \bmod 32$

Table 11 – Four-field intrasector deshuffling

	Sectors 0, 2	Sectors 1, 3
Field 0:	$\text{Row} = R$	$\text{Row} = (16 + R) \bmod 32$
Field 1:	$\text{Row} = (31 - R) \bmod 32$	$\text{Row} = (15 - R) \bmod 32$
Field 2:	$\text{Row} = (24 + R) \bmod 32$	$\text{Row} = (8 + R) \bmod 32$
Field 3:	$\text{Row} = (7 - R) \bmod 32$	$\text{Row} = (23 - R) \bmod 32$

Calculate Rstart,

$$Rstart = (30 \times Igrp + 5u) \bmod 32,$$

Calculate Rcnt,

$$Rcnt = (23 \times Row) \bmod 32,$$

Calculate Obyt,

$$Obyt = (Rcnt - Rstart) \bmod 32,$$

Calculate Oblk,

$$Oblk = Icnt \bmod 12,$$

Calculate line number, m,

$$m = \text{int}(Igrp/3), 0 \leq m \leq 49,$$

The intrasector mapping from (m, Oblk, Obyt) to the output order may be derived from the formula in 4.3 and 4.4.1.

4.5 Outer error protection

Two rows of each video subarray contain the error correction check data associated with each column of 8-bit bytes.

Type: Reed-Solomon

Galois field: GF(256)

Field generator polynomial: $x^8 + x^4 + x^3 + x^2 + x^0$
(x^i are place keeping variables in GF(2), the binary field.

Order of use: Left-most term is the most significant, "oldest" in time computationally, and first written to tape.

Code generator polynomial: $G(x) = (x + \infty^0)(x + \infty^1)$, where ∞^1 is given by 02H in GF(256).

Check characters: K_1 and K_0 in $K_1x^1 + K_0x^0$, the remainder after dividing $x^2 \times D(x)$ by $G(x)$, where $D(x)$ is the polynomial given by $D(x) = B_{29}x^{29} + B_{28}x^{28} + \dots + B_1x^1 + B_0x^0$

Equation of full code: $B_{29}x^{31} + B_{28}x^{30} + \dots + B_0x^2 + K_1x^1 + K_0x^0$

Table 12 shows an example of three possible patterns, where pattern 1 is the impulse function, where the values in the check location represent the expansion of the code generator polynomial.

5 Audio processing

5.1 Introduction

Audio in each of the four channels is processed independently and identically into two product blocks with dimensions of 60 x 7 for each channel. The audio samples of each channel are distributed alternately into these two blocks and are then shuffled after the addition of error correction data in the vertical (7) dimension. Error correction in the horizontal (60) dimension is common with video data, as are synchronization and channel coding. Control words are multiplexed with the audio data in the product block to provide housekeeping in the interface and in processing.

5.2 Source coding (AES/EBU)

Audio records are formed independently for each of four audio channels, from audio and ancillary data at the input interface that meet the requirements of ANSI S4.40. These data include audio data, channel status data (C), user data (U), and validity data (V). Parity bits are checked for correctness of data and then discarded. The resulting bit positions in the audio data words are reserved (R) for future use. Block sync marks for ancillary data are also processed.

Table 12 – Outer error protection patterns

Symbol position	Data symbols -- D (x)						Check symbols			
	0	1	2	3	4	5	28	29	30	31
Pattern 1	00	00	00	00	00	00	00	01	03	02
Pattern 2	00	01	02	03	04	05	1C	1D	6B	6A
Pattern 3	CC	CC	CC	CC	CC	CC	CC	CC	4D	4D
Symbol identify	B ₂₉	B ₂₈	B ₂₇	B ₂₆	B ₂₅	B ₂₄	B ₁	B ₀	K ₁	K ₀

Source data is defined as follows:

5.2.1 Audio data

Sampling frequency: 48 kHz = 3 parts in 10^6 , synchronous with video;

Sample timing: The first audio sample shall be time-coincident with line 9 of the video signal ± 6 lines (20 samples);

Word length: 20 + 4 bits;

Coding: Twos complement linear PCM.

5.2.2 Channel status data

Bit rate: 48 kbit/s (nominal);

Word rate: 6 kbyte/s;

Word length: 8 bits;

Block length: 192 bits, 24 words;

Coding: See ANSI S4.40.

NOTES

1 Bytes 0 and 1 of status data only are selected for special processing in the digital television tape recorder. The contents of bytes 0 and 1 are shown in figures 11 and 12.

2 Bytes 22 and 23 of the status data contain protection and validity information for bytes 0-21 and may be used in some source decoders.

5.2.3 User data

As status data but data coding is undefined.

5.2.4 Validity data

Bit rate: One bit associated with each audio word;

Coding: 0 = sample valid; 1 = sample defective.

Figure 11 – Channel status data — Byte 0

Figure 12 – Channel status data — Byte 1

Table 13 – Byte status

Mode	0	1	2	3	
0	0	0	0	0	Undefined — 2 channel
1	0	0	0	1	2 channel
2	0	0	1	0	Single channel
3	0	0	1	1	Primary/secondary 2 channel
4	0	1	0	0	Stereophonic
5	0	1	0	1	} Undefined
through		through			
F	1	1	1	1	

5.2.5 Parity bit

Bit rate: One bit associated with each audio word;

Coding: Even parity of associated word including audio, status, user, and validity data.

5.3 Source processing

5.3.1 Introduction

Audio data is processed in segments corresponding in duration to four helical tracks or one-fifth of a video frame. Each segment contains approximately 320 audio samples for an audio channel with associated status, user, and validity data. In addition, a number of control and user words are added to the data in the last complete block received.

5.3.2 Segment

Each segment of audio data is processed into two audio blocks of 10 x 60 bytes, each corresponding to a sector. One block contains even-numbered words and the other odd-numbered words. The data portion of the block is 7 x 60 with the balance being outer error correction words. For convenience, data is processed in four-bit words:

Audio data word: 318 to 322 data words with associated C, U, V, R bits (20 bits total per word)

Interface control words: 6 words of four bits and 2 words of eight bits. (For security, one word, LNGH, is written four times in each block.)

Processor control words: 9 words of four bits. (For security, two words, BCNT and SEQN, are written four times in each block.)

User control words: 8 words of eight bits are included in each block, giving a total of 16 bytes per segment for user data.

5.3.3 Audio data word processing

Input data is formed into words of twenty bits in the sequence.

5.3.3.1 Assignment of the twenty-bit word to audio and associated data is controlled by user input in accord with table 14.

The most significant bit of the audio word is in bit 19 and unused bits of lower significance are removed. The interface control word (ICW) LNGH (four bits) signals the word mode selected.

5.3.3.2 The twenty-bit words formed as in 5.3.3.1 are separated into two groups by selection of alternate words into EVEN (0, 2, 4, etc.) and ODD (1, 3, 5, etc.) beginning at the start of the sequence.

5.3.3.3 Each group of twenty-bit words is divided into 8-bit bytes as shown in figure 13, beginning with the LSB of the first word of the word group.

5.3.3.4 Each group (ODD or EVEN) is distributed into the product block in accordance with figure 14. Word 159 (bytes 9,55; 9,56; 9,57) and word 160 (bytes 3,55; 3,56; 3,57) may not be present in all blocks depending on the current relationship between video and audio clock synchronization and phasing. When not used, this space is zero filled. The processing control word (PCW) B CNT specifies the length of the block between 397½ bytes (159 audio data words) and 402½ bytes (161 audio data words).

Table 14 – Audio interface control input

Word mode	Bit				
	0	1	2	3	4 through 19
0 (000)	C	U	V	R	Audio 0 – 15
1 (001)	C	U	V	Audio 0 (LSB)	Audio 1 – 16
2 (010)	C	V	Audio 0 (LSB)	Audio 1	Audio 2 – 17
3 (011)	C	U	Audio 0 (LSB)	Audio 1	Audio 2 – 17
4 (100)	C	Audio 0 (LSB)	Audio 1	Audio 2	Audio 3 – 18
5 (101)	V	Audio 0 (LSB)	Audio 1	Audio 2	Audio 3 – 18
6 (110)	U	Audio 0 (LSB)	Audio 1	Audio 2	Audio 3 – 18
7 (111)	Audio 0 (LSB)	Audio 1	Audio 2	Audio 3	Audio 4 – 19


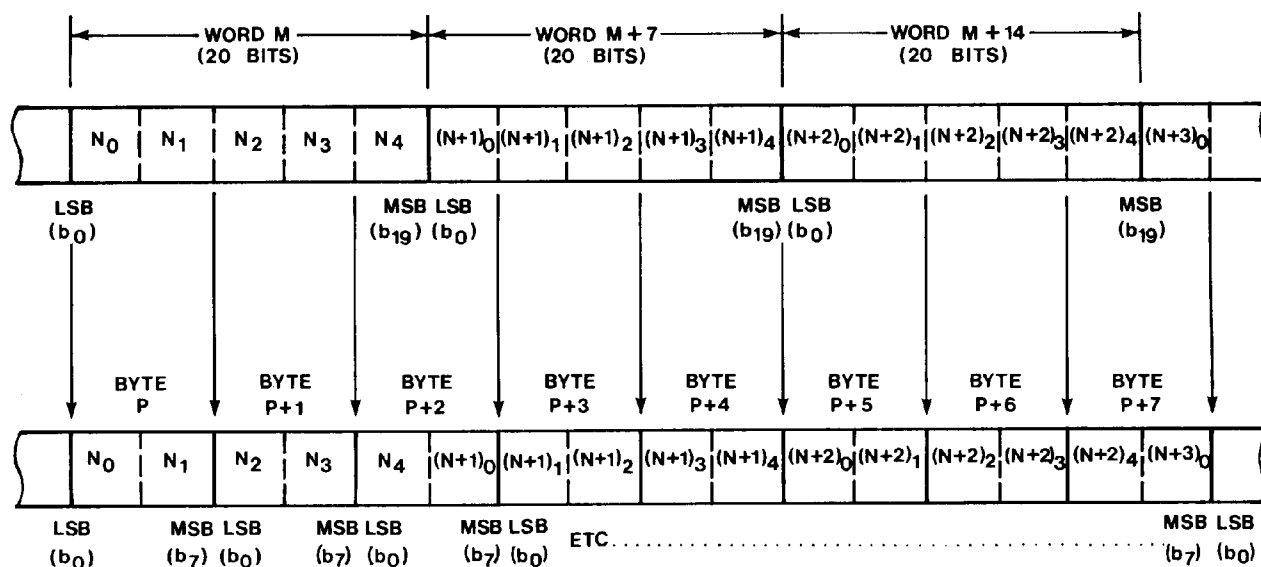


Figure 13 – Word-to-byte conversion for digital audio

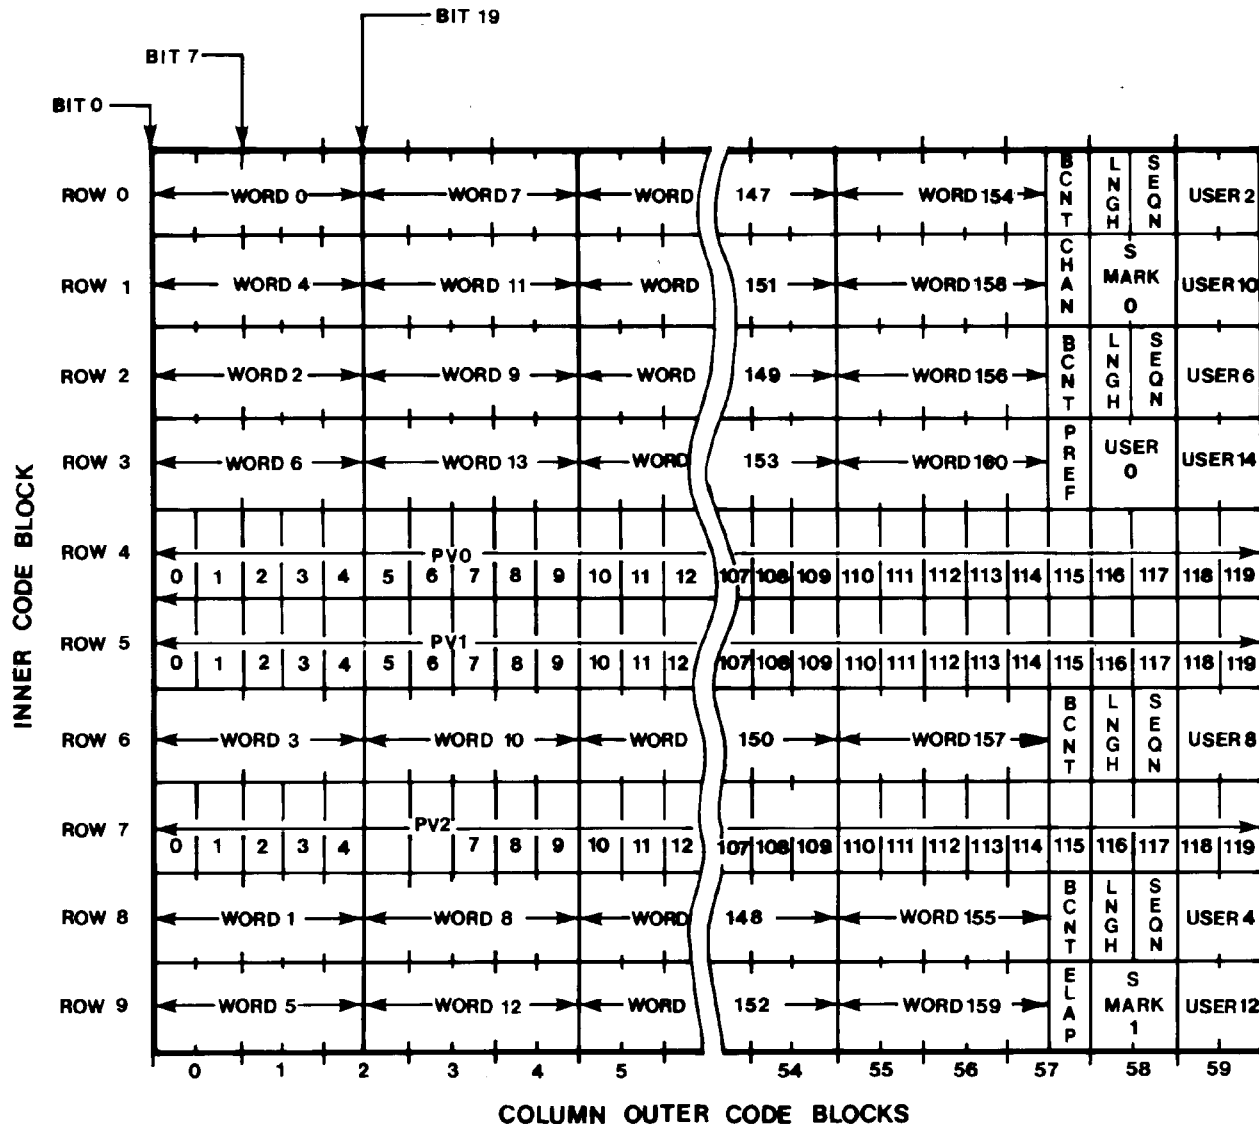

NOTES

- 1 Words 159, 160 may not be data filled in all blocks.
- 2 Words 0, 1, 2, 3, etc., refer to a sequence of even audio data words in an even audio product block, and correspond to the odd audio data words in an odd audio product block.

Figure 14 – Audio data block layout (even block shown — odd is similar)

5.3.3.5 Since audio data is synchronous with a 29.97-Hz video frame frequency, the sequence of blocks shall be in accordance with table 15.

The start of audio frame 0 is related to the control track reference pulse described in 6.7.

5.4 Interface control words

Interface control words (ICW) are generated at the input interface from incoming data or user selection and serve to signal this information to the output interface. ICWs have a length of four or eight bits.

5.4.1 Channel use (CHAN) — 4 bits


CHAN specifies the usage of the two input channels in an interface data stream. CHAN is derived from AES/EBU channel status byte 1 (see figure 15 and table 16).

When CHAN bits are recorded on tape, they shall be put on the tape in the order of B0, B1, B2, and B3.


CHAN is inserted in bits 4-7 of byte (1,57) of both audio product blocks.

Table 15 – 525/60 audio frame block sequence

Frame No.	Segment No.	Audio sample count		Frame
		Even block	Odd block	
0	00	160	160	1602
	01	161	160	
	02	160	160	
	03	161	160	
	04	160	160	
1	05	160	160	1601
	06	160	160	
	07	161	160	
	08	160	160	
	09	160	160	
2	0A	160	160	1602
	0B	161	160	
	0C	160	160	
	0D	161	160	
	0E	160	160	
3	0F	160	160	1601
	10	160	160	
	11	161	160	
	12	160	160	
	13	160	160	
4	14	160	160	1602
	15	161	160	
	16	160	160	
	17	161	160	
	18	160	160	

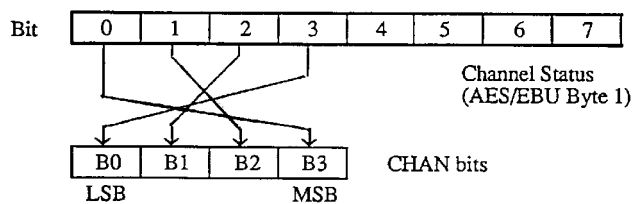**Figure 15 – Audio input channel status****Table 16 – Audio input channel status**

Mode	CHAN				Value
	B3	B2	B1	B0	
0	0	0	0	0	2 channel — default
1	0	0	0	1	2 channel
2	0	0	1	0	Single channel
3	0	0	1	1	Primary/secondary 2 channel
4	0	1	0	0	Stereophonic
5	0	1	0	1	} Undefined
through		through			
F	1	1	1	1	

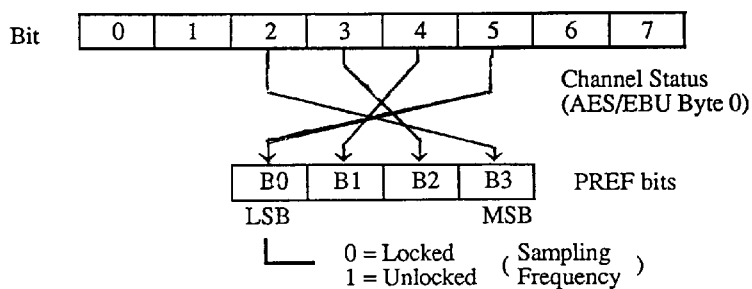**Figure 16 – Audio input preemphasis status****Table 17 – Audio input preemphasis status**

Mode	PREF bit			Value
	B3	B2	B1	
0	0	0	0	Preemphasis off — (default)
1	0	0	1	Reserved
2	0	1	0	Reserved
3	0	1	1	Reserved
4	1	0	0	Preemphasis off
5	1	0	1	Reserved
6	1	1	0	50 / 15 μ s (CD type)
7	1	1	1	-6.5 dB at 800 Hz (CCITT J17)

5.4.2 Preemphasis (PREF) — 4 bits

PREF specifies the usage of preemphasis in the audio coding. Pref is derived from AES/EBU channel status byte 0 (see figure 16 and table 17).

When PREF bits are recorded on tape, they shall be put on the tape in the order of B0, B1, B2, and B3.

PREF is inserted in bits 4–7 of byte (3,57) of both audio product blocks.

5.4.3 Audio data word mode (LNGH) — 4 bits

LNGH specifies the audio word length and the usage of the ancillary bits Status, User, and Validity. LNGH is derived from user control inputs (see figure 17 and table 18). LNGH is inserted in bits 0–3 in column 58, rows 0,2,6,8.

5.4.4 Block sync location S MARK 0, S MARK 1 — 8 bits

Specifies the location of the first and last block sync associated with channel status and user data as defined in ANSI S4.40. S MARK 0 contains the word count, in the current block, of the first block sync detected; i.e., the word address in the ODD or EVEN block pointing to the first sample after the block sync mark. S MARK 1 identifies the last block sync detected. Where multiple marks are encountered, only the last one will be stored (see figure 18).

S MARK 0, S MARK 1= AA_H if no mark is found within the defined range.

S MARK 1= AA_H if only one mark is found within the defined range.

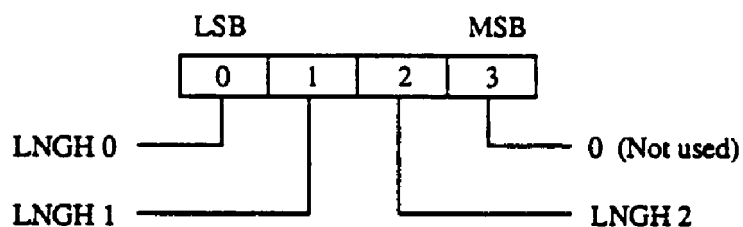


Figure 17 – Audio data word length

Table 18 – Audio data word length

Mode	Bits			Audio length	Ancillary bits			
	2	1	0		C	U	V	R
0	0	0	0	16 bits	X	X	X	X
1	0	0	1	17 bits	X	X	X	--
2	0	1	0	18 bits	X	--	X	--
3	0	1	1	18 bits	X	X	--	--
4	1	0	0	19 bits	X	--	--	--
5	1	0	1	19 bits	--	--	X	--
6	1	1	0	19 bits	--	X	--	--
7	1	1	1	20 bits	--	--	--	--

Figure 18 – Audio block sync

S MARK 0 is inserted in byte 1,58 of each block, with the default value AA_H placed in corresponding location in the block (ODD or EVEN) not containing the mark. S MARK 1 is inserted similarly in byte (9,58).

5.5 Processing control words

Processing control words (PCW) are employed to pass control information from the record processor to the playback processor. They consist of 4-bit or 8-bit words.

5.5.1 Word count (B CNT) — 4 bits


B CNT specifies the number of useful data words in the current block, a number lying between 159 and 161 words (397.5 to 402.5 bytes) (see figure 19).

Figure 19 – Audio word block count

B CNT is inserted in bits 4-7 of bytes (0,57), (2,57), (6,57), (8,57) of the associated block.

5.5.2 Overlap edit (E LAP) — 4 bits

E LAP specifies the segment associated with an overlap edit transition, during which time the new (downstream) audio data replaces the old (upstream) audio data only in the duplicate audio sector rows 2 and 3.




E LAP = F_H for an overlap segment

E LAP = 0_H otherwise

E LAP is inserted in bits 4–7 of byte (9,57) of both blocks.

5.5.3 Sequence (SEQN) — 4 bits

SEQN specifies a sequence of 15 blocks (each of 4 fields) to aid processing in high-speed data recovery.



SEQN advances in binary count, modulo 15 from an arbitrary origin; is inserted in bits 4–7 of column 58 rows 0, 2, 6, 8, and may be discontinuous after editing operations.

5.6 User control words (UCW)

User control words serve to pass user information from the record processor to the playback processor. They are of 8-bit length. Their contents are not specified herein. UCWs are provided in table 19. UCW 0 is undefined and reserved by SMPTE for future use.

Table 19 – User control words

UCW	BLOCK	BYTE
0	EVEN	(3,58)
2	EVEN	(0,59)
4	EVEN	(8,59)
6	EVEN	(2,59)
8	EVEN	(6,59)
10	EVEN	(1,59)
12	EVEN	(9,59)
14	EVEN	(3,59)
1	ODD	(3,58)
3	ODD	(0,59)
5	ODD	(8,59)
7	ODD	(2,59)
9	ODD	(6,59)
11	ODD	(1,59)
13	ODD	(9,59)
15	ODD	(3,59)

5.7 Outer error protection

Rows 4, 5, 7 of the blocks contain the error protection data associated with each column.

Type: Reed-Solomon

Galois field: GF(16)

Field generator polynomial: $x^4 + x^1 + x^0$; (x^i are place keeping variables in GF(2), the binary field.)

Order of use: Left-most term is the most significant, "oldest" in time computationally, and first written to tape.

Code generator polynomial (in GF(16)): $G(x) = (x + \infty^0)(x + \infty^1)(x + \infty^2)$. ∞^1 is given by 02H in GF(16).

Check characters: K_2, K_1, K_0 (identified respectively as PV_2, PV_1, PV_0) in $K_2x^2 + K_1x^1 + K_0x^0$, the remainder after dividing the polynomial $x^3 \times D(x)$ by $G(x)$, where $D(x)$ is the polynomial given by $D(x) = B_6x^6 + B_5x^5 + \dots + B_1x^1 + B_0x^0$

Equation of full code: $B_6x^9 + B_5x^8 + \dots + B_0x^3 + K_2x^2 + K_1x^1 + K_0x^0$

Outer code check characters in each column of the 60 x 10 blocks are calculated using the data order existing prior to the rearrangement into the pattern shown in figure 14; i.e., in ascending sample order.

The check characters K_2 through K_0 are used as the vertical protection characters PV_2 through PV_0 , respectively, and inserted in their associated column at rows 4, 5, 7.

Table 20 shows an example of three possible patterns, where pattern 1 is the impulse function, where the values in the check locations represent the expansion of the code generator polynomial.

5.8 Inner protection and channel coding

Generation of the inner code check characters PH_0 through PH_3 is fully described in clause 3 of this standard. This coding is common with the video processor.

5.9 Order of transmission to inner coding

The block of data shown in figure 15 is passed sequentially to the inner coding process as follows:

Row 0 — col 0 to 59

Row 1 — col 0 to 59

Row 9 — col 0 to 59

5.10 Sector usage

Audio data from each of the four recording channels is placed on tape as shown in figure 20. Each data block (ODD and EVEN) from a channel (1,2,3,4) is recorded twice. During the overlap period of an edit, the new data is recorded only in audio sector rows 2 and 3 and the existing data is retained in audio sector rows 0 and 1.


6 Tracking-control record

6.1 The tracking-control record shall be a series of pulse doublets recorded on the track as shown in figure 21. The location of the tracking control record and its positioning relative to video information is defined in ANSI/SMPTE 224M.

6.2 During time interval A of the record, the polarity of the tracking-control flux shall be such that the south pole of the magnetic domain points in the direction of normal tape travel and, similarly, during time interval B, the north pole shall be similarly oriented.

Table 20 – Outer error protection patterns

Symbol position	Data symbols – D(x)							Check symbols		
	0	1	2	3	4	5	6	7	8	9
Pattern 1	0	0	0	0	0	0	1	7	E	8
Pattern 2	0	1	2	3	4	5	6	B	0	C
Pattern 3	C	C	C	C	C	C	C	6	9	3
Symbol identify	B ₆	B ₅	B ₄	B ₃	B ₂	B ₁	B ₀	K ₂	K ₁	K ₀

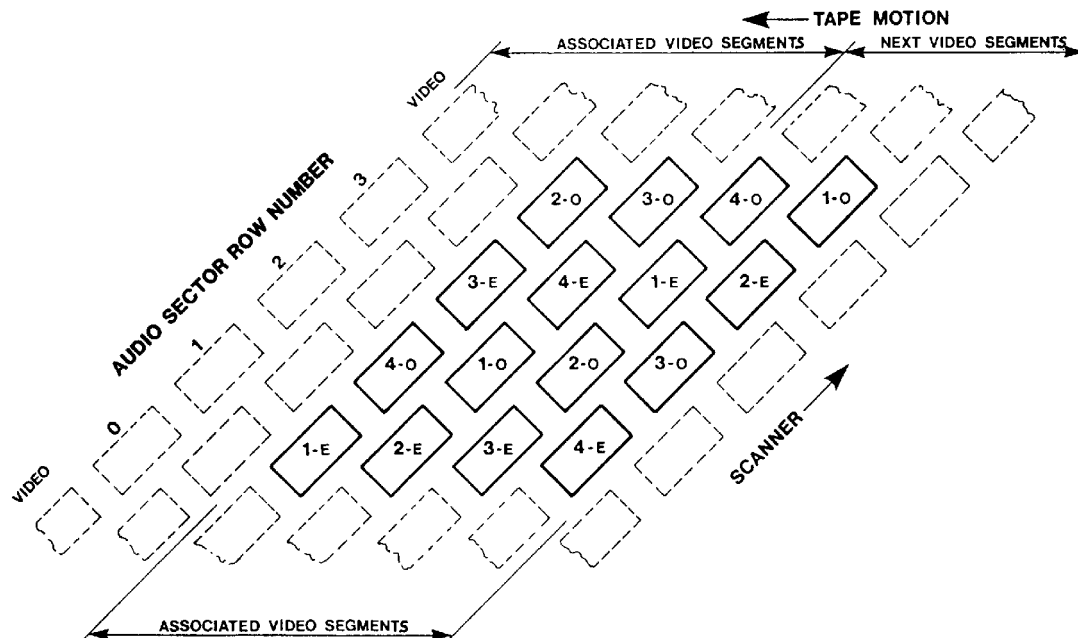

NOTE – 1, 2, 3, 4 indicate channel numbers.
O = ODD samples: E = EVEN samples.

Figure 20 – Audio sector arrangement

NOTES

- 1 T is $\frac{1}{64}$ the period of 4 helical tracks; T = 104.2 μ s nom.
- 2 Rise/fall time of pulse doublet is < 15 μ s.

Figure 21 – Recorded control record waveform timing

6.3 The recorded peak-to-peak flux shall correspond to an RMS magnetic short circuit flux level of $185 \text{ nwb/m} \pm 20 \text{ nWb/m}$ of track width.

6.4 The recorded pulse doublets shall each have a half-width T , where T is $1/64$ times the period of four helical tracks. The record current rise and fall times shall be less than $15 \mu\text{s}$ (10% – 90%), and be matched within $5 \mu\text{s}$.

6.5 Servo reference pulse doublets shall be separated by a pitch distance equivalent to four helical tracks (150-Hz nominal frequency). They are aligned with the end of the preamble for video section 0, as shown in ANSI/SMPTE 224M.

6.6 A second pulse doublet shall indicate the first segment of the video frame. It shall be located a distance $4T$ after the servo reference pulse doublet. (The video frame begins when $F = 0$ in the end of active video [EAV] timing reference signal, as shown in ITU-R Report 962-1, that occurs in segment 0 of field 0).

6.7 A third pulse doublet shall, when present, indicate the start of an audio frame sequence. It shall be located at a distance $8T$ after the servo reference pulse doublet.

6.8 A fourth pulse doublet shall indicate the start of a field sequence. It shall be located at a distance $12T$ after the servo reference pulse doublet. This pulse doublet may be referenced to an external 15-Hz (nominal) signal.

6.8.1 If the signal being recorded has been decoded from an NTSC source, the field sequence pulse should identify field 1.

6.8.2 For a continuous recording, the field sequence pulse should not change its place.

6.9 Any edit shall take place in the unmagnetized space between pulse groups.

Annex A (informative)

Bibliography

ANSI/SMPTE 125M-1995, Television — Component Video Signals 4:2:2 — Bit-Parallel Digital interface

ANSI/SMPTE 225M-1996, Television Digital Component Recording — 19-mm Type D-1 — Magnetic Tape

SMPTE 226M, Television Digital Recording — 19-mm Tape Cassettes

ANSI/SMPTE 228M-1996, Television Digital Component Recording — 19-mm Type D-1 — Time and Control Code and Cue Records

ANSI/SMPTE 244M-1995, Television — System M/NTSC Composite Video Signals — Bit-Parallel Digital Interface

SMPTE EG 10, Tape Transport Geometry Parameters for 19-mm Type D-1 Television Digital Component Recording

SMPTE EG 21-1993, Nomenclature for Television Digital Recording of 19-mm Type D-1 Component and Type D-2 Composite Formats

CCITT Vol III, Fascicle III.6, Line Transmission of Non-telephone Signals, Transmission of Sound-Programme and Television Signals, Series H and J Recommendations (Study Group XV)

ITU-R Report 962-1, The Filtering, Sampling and Multiplexing for Digital Encoding of Colour Television Signals