
SMPTE STABLE DOCUMENT



The attached SMPTE Engineering Document has been declared “Stable” by the controlling Technology Committee.

The SMPTE Operations Manual for Standards states:

A document should be stabilized if it is believed to be substantially correct, does not contain harmful or misleading recommendations, may still be relevant to equipment or practices in use, is stable, but does not represent current technology, and need not be subject to future reviews.

A Stable document shall still be made available and offered for sale by the Society, but it shall be prefaced by a cover page explaining its current status.

At any time, a Technology Committee may revise, amend, or otherwise initiate a new Project on a Stable document.

A Stable document is “In Force”, and not deprecated or withdrawn.

*** * * * ***

Note:

SMPTE “Stable” documents were previously described as “Archived” and the attached document may be marked as “Archived”. The status of a SMPTE document described as “Archived” is exactly as described above for a “Stable” document.

Stable documents may not adhere to the latest style and format of SMPTE documents, or to current usage of normative language. Suitable care should be taken in interpretation.

SMPTE STANDARD

for Motion-Picture Film (35-mm) — Perforated DH-1870



Page 1 of 3 pages

1 Scope

This standard specifies the cutting and perforating dimensions for 35-mm motion-picture film with a DH-type perforation and a perforation pitch of 0.1870 in (4.750 mm).

2 Dimensions

2.1 The dimensions shall be as given in figure 1 and table 1.

2.2 The dimensions pertain to a safety film as defined in SMPTE 223M.

2.3 The dimensions apply at the time of cutting and perforating for film adjusted to a temperature of $23^{\circ}\text{C} \pm 1^{\circ}\text{C}$ (nominally converted to $73^{\circ}\text{F} \pm 2^{\circ}\text{F}$) and a relative humidity of $(50 \pm 2)\%$. The manufacturer may indicate other nominal temperature and humidity conditions under which the dimensions apply.

NOTES

1 The title of this standard was established by the application of a nomenclature system developed for all film dimension standards: Each title provides an indication of the film width, a code designation for the perforation shape (BH, KS, DH, or CS), or the number of rows of perforations (1R, 2R, etc.), depending upon which is the significant factor, or the perforation pitch without the decimal point.

2 The metric conversion of dimension A is purposely chosen and shown to three decimal places to prevent the maximum width dimension from exceeding 35 mm.

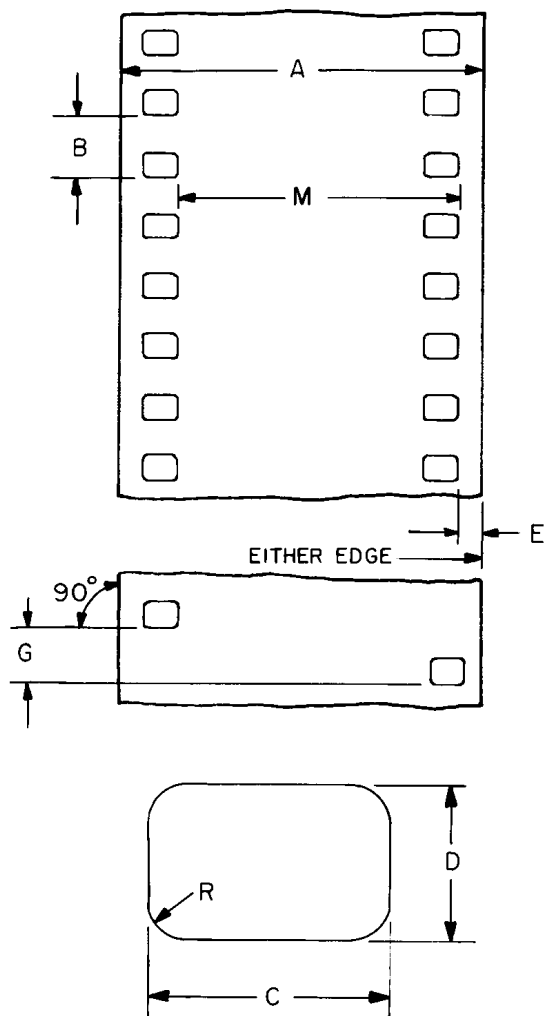


Figure 1 – Dimensions

Table 1 – Specifications

Dimensions		Inches	Millimeters
A	Film width	1.377 ± 0.001	34.975 ± 0.025
B	Perforation pitch	0.1870 ± 0.0004	4.750 ± 0.010
C	Perforation width	0.1100 ± 0.0004	2.794 ± 0.010
D	Perforation height	0.0730 ± 0.0004	1.854 ± 0.010
E	Edge to perforation	0.079 ± 0.002	2.01 ± 0.05
G	Perforation misalignment	0.001 max	0.03 max
L	100 consecutive perforation pitches	18.700 ± 0.015	474.98 ± 0.38
M	Lateral perforation displacement	1.109 ± 0.001	28.17 ± 0.03
R	Radius of perforation fillet	0.013 ± 0.001	0.33 ± 0.03

Annex A (informative)**Additional data**

A.1 The user is reminded that, as a plastic, film can change dimensions temporarily due to moisture or temperature, or permanently due to solvent loss or strain effect.

A.2 Film for positive use has a longitudinal pitch 0.2% longer than its companion negative. Shrinkage of the negative during aging and processing prior to printing will generally not exceed 0.2%. Thus, the negative stock is expected to be $0.3\% \pm 0.1\%$ shorter than the positive. This difference will minimize slippage between the two on the 12-in (305-mm) circumference sprocket of the printer, assuming a film thickness of 0.0055 in to 0.0065 in (0.140 mm to 0.165 mm).

A.3 The uniformity of pitch, hole size, and margin (dimensions B, C, D, and E) is an important variable affecting steadiness. Variations in these dimensions, from roll to roll, are of little significance compared to variations from one perforation to the next within any small group of consecutive perforations. As an example, the uniformity of the margin is uniquely critical for optical printing. During the printing process, the placement of the image on the film is usually with respect to successive lateral pairs of perforations at one-frame intervals. During subsequent projection, however, the portion of the image projected is usually located, not by these perforations, but by the edge of the film. The lateral steadiness of the projected image is, therefore, directly related to the frame-to-frame uniformity of the margin.

Annex B (informative)**Bibliography**

SMPTE 223M-2001, Motion-Picture Film - Safety Film

Miller, A.J. and Robertson, A.C. Motion-picture film - It's size and dimensional characteristics. Journal of the SMPTE 74(1):3-11; January 1965.