
SMPTE STABLE DOCUMENT



The attached SMPTE Engineering Document has been declared “Stable” by the controlling Technology Committee.

The SMPTE Operations Manual for Standards states:

A document should be stabilized if it is believed to be substantially correct, does not contain harmful or misleading recommendations, may still be relevant to equipment or practices in use, is stable, but does not represent current technology, and need not be subject to future reviews.

A Stable document shall still be made available and offered for sale by the Society, but it shall be prefaced by a cover page explaining its current status.

At any time, a Technology Committee may revise, amend, or otherwise initiate a new Project on a Stable document.

A Stable document is “In Force”, and not deprecated or withdrawn.

*** * * * ***

Note:

SMPTE “Stable” documents were previously described as “Archived” and the attached document may be marked as “Archived”. The status of a SMPTE document described as “Archived” is exactly as described above for a “Stable” document.

Stable documents may not adhere to the latest style and format of SMPTE documents, or to current usage of normative language. Suitable care should be taken in interpretation.

SMPTE STANDARD

SMPTE 93–2005Revision of
ANSI/SMPTE 93-1998

for Motion-Picture Film (35-mm) — Perforated BH



Page 1 of 3 pages

1 Scope

This standard specifies the cutting and perforating dimensions for 35-mm motion-picture film with a BH-type perforation and a perforation pitch of either 0.1866 in or 0.1870 in (4.740 mm or 4.750 mm).

2 Normative reference

The following standard contains provisions which, through reference in this text, constitute provisions of this standard. At the time of publication, the edition indicated was valid. All standards are subject to revision, and parties to agreements based on this standard are encouraged to investigate the possibility of applying the most recent edition of the standard indicated below.

SMPTE 223M-2001, Motion-Picture Film — Safety Film

3 Dimensions

3.1 The dimensions shall be as given in figure 1 and table 1.

3.2 The dimensions pertain to safety film as defined in SMPTE 223M.

3.3 The dimensions apply at the time of cutting and perforating for film adjusted to a temperature of $23^{\circ}\text{C} \pm 1^{\circ}\text{C}$ (nominally converted to $73^{\circ}\text{F} \pm 2^{\circ}\text{F}$) and a relative humidity of $(50 \pm 2)\%$. The manufacturer may indicate other nominal temperature and humidity conditions under which the dimensions apply.

3.4 Dimension H is a calculated value, without corner radii.

NOTE – The title of this standard was established by the application of a nomenclature system developed for all film dimension standards. Each title provides an indication of the film width, a code designation for the perforation shape (BH, KS, DH, or CS), or the number of rows of perforations (1R, 2R, etc.), depending upon which is the significant factor, or the perforation pitch without the decimal point.

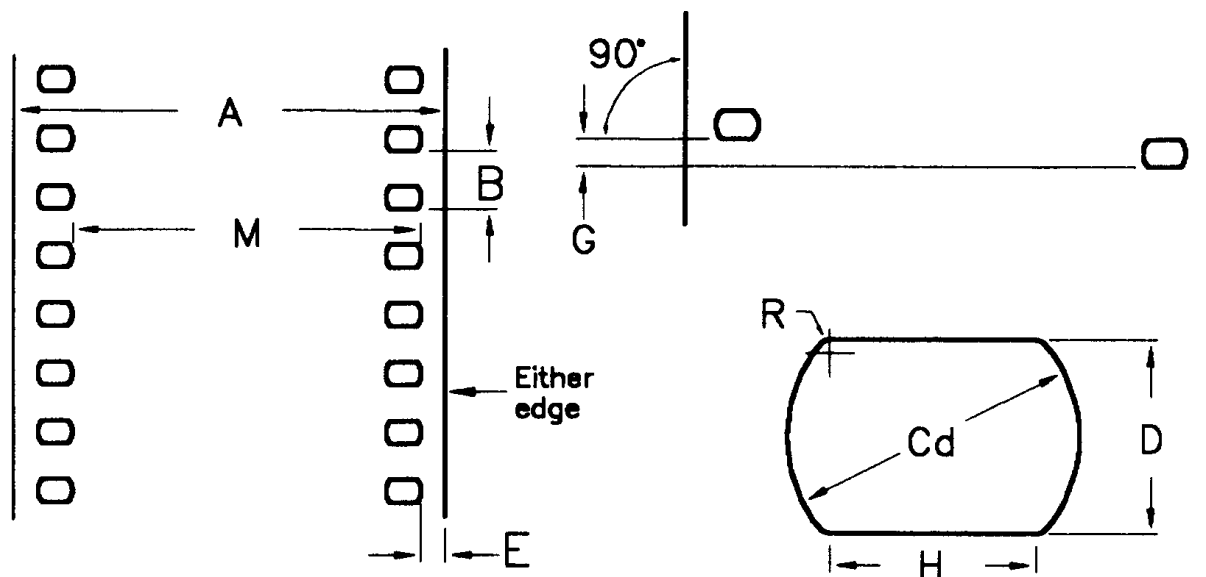


Figure 1 – Dimensions

Table 1 – Specifications

Dimensions		Inches	Millimeters
A	Film width	1.377 ± 0.001	34.975 ± 0.025
B	Perforation pitch (long)	0.1870 ± 0.0004	4.750 ± 0.010
B'	Perforation pitch (short)	0.1866 ± 0.0004	4.740 ± 0.010
C _d	Perforation width (diameter)	0.1100 ± 0.0004	2.794 ± 0.010
D	Perforation height	0.0730 ± 0.0004	1.854 ± 0.010
E	Edge to perforation	0.079 ± 0.002	2.01 ± 0.05
G	Perforation misalignment	0.001 max	0.03 max
H	Perforation chord width (BH perforation)	0.082 calculated	2.08 calculated
L	100 consecutive perforation pitches (long)	18.700 ± 0.015	474.98 ± 0.38
L'	100 consecutive perforation pitches (short)	18.660 ± 0.015	473.96 ± 0.38
M	Lateral perforation displacement	1.109 ± 0.001	28.17 ± 0.03
R	Radius of corners	0.005 max	0.13 max

NOTE – The metric conversion of dimension A is purposely chosen and shown in three decimal places to prevent the maximum width dimension from exceeding 35 mm.

Annex A (informative)**Additional data**

A.1 The user is reminded that, as a plastic, film can change dimensions temporarily due to moisture or temperature, or permanently due to solvent loss or strain effect.

A.2 Film for positive use has a longitudinal pitch 0.2% longer than its companion negative. Shrinkage of the negative during aging and processing prior to printing will generally not exceed 0.2%. Thus, the negative stock is expected to be $0.3\% \pm 0.1\%$ shorter than the positive. This difference will minimize slippage between the two on the 12 in (305 mm) circumference sprocket of the printer, assuming a film thickness of 0.0055 in to 0.0065 in (0.140 mm to 0.165 mm).

A.3 The uniformity of pitch, hole size, and margin (dimensions B, C_d, D, and E) are important variables affecting steadiness. Variations in these dimensions from roll to roll are of little significance compared to variations from one perforation to the next within any small group of consecutive perforations. As an example, the uniformity of the margin is uniquely critical for optical printing. During the printing process, the placement of the image on the film is usually with respect to successive lateral pairs of perforations at oneframe intervals. During subsequent projection, however, the portion of the image projected is usually located, not by these perforations, but by the edge of the film. The lateral steadiness of the projected image is, therefore, directly related to the frame-to-frame uniformity of the margin.

A.4 For historical background on the development of this standard, refer to Miller, A.J. and Robertson, A.C. Motion-picture film — its size and dimensional characteristics. Jour. SMPTE, 74: 3-11, Jan. 1965.